



Interested in learning  
more about security?

## SANS Institute InfoSec Reading Room

This paper is from the SANS Institute Reading Room site. Reposting is not permitted without express written permission.

### Implementing Secure Access to Cisco Devices using TACACS+ and SSH

Many environments that I encounter are using a Defense-In-Depth network security strategy. They have implemented firewalls, Intrusion Detection, VPN, and have a good security policy. When asked, however, how they manage their large installation of Cisco network devices, the reply many times is clear-text telnet, no username/password authentication combination, and very little in the way of auditing logs. The goal of this paper is to provide an easy guide for network administrators to implement secure remote access for ...

Copyright SANS Institute  
Author Retains Full Rights

AD

Veriato

Unmatched visibility into the computer  
activity of employees and contractors



Try Now

# Implementing Secure Access to Cisco Devices using TACACS+ and SSH

Paul Asadoorian, GCIA, GCIH

[paul@pauldotcom.com](mailto:paul@pauldotcom.com)

<http://pauldotcom.com>

Revision 1.2  
May 13, 2003

© SANS Institute 2003, Author retains full rights

## Goals


---

Many environments that I encounter are using a Defense-In-Depth network security strategy. They have implemented firewalls, Intrusion Detection, VPN, and have a good security policy. When asked, however, how they manage their large installation of Cisco network devices, the reply many times is clear-text telnet, no username/password authentication combination, and very little in the way of auditing logs. The goal of this paper is to provide an easy guide for network administrators to implement secure remote access for all Cisco networking equipment.

## Topology and Supported Platforms

---

We will assume in this paper that the environment is using Cisco networking equipment, and running Cisco IOS version 12.1.1 or later with 3DES support. This covers switches (a limited selection) and routers right now, with support for access points and other devices on the way. The topology will be as follows:

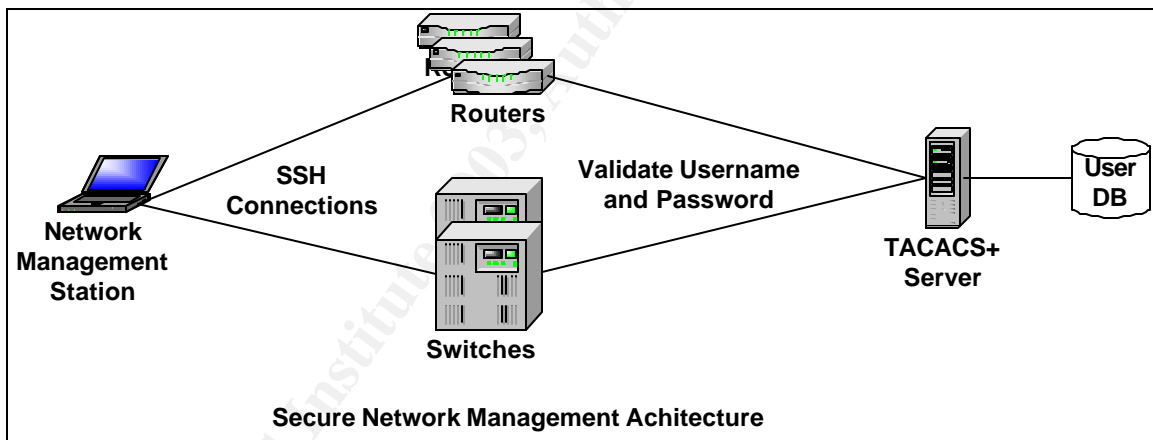

The diagram above shows the network management station using SSH to connect to the networking equipment. This connection uses SSH protocol version 1 which provides for encryption. Be aware that SSH1, while encrypted, is vulnerable to Man-In-the-Middle attacks. See the "Further Recommendations" section for ways to help prevent against these attacks. SSH version 2 is not implemented on Cisco devices at the time of this writing.

Once a successful SSH connection is established you will need to enter a username and password. The network device takes the username and password and validates it with the TACACS+ server. The username is sent in clear-text, but the password is encrypted. The TACACS+ server receives the request and validates the username/password pair against a local UNIX user

database. The TACACS+ server then sends a message back to the network device indicating whether or not the username/password pair was in fact valid. This is a desirable setup because:

- The password is encrypted when traveling across the network throughout the entire process
- The primary authentication information (i.e. usernames and passwords) is not stored on the network device
- All devices point toward a central location, making it easy to change/expire users and passwords
- Accounting information is greatly enhanced since TACACS+ will log all commands that are entered into the device
- Authentication requires both a username and a password, which makes brute forcing the login more difficult than just a vty/enable password
- TACACS+ provides the ability to manage access at a very granular level; examples include using regular expressions to determine which commands a user can run.

### **TACACS+ Server configuration**

---

The TACACS+ server discussed in this paper was written by Devrim Seral and can be downloaded from [www.gazi.edu.tr/tacacs](http://www.gazi.edu.tr/tacacs) . It installs in similar fashion most other UNIX based software:

```
# tar zxvf tac_plus_v9a
# cd tac_plus_v9a
# ./configure
# make tac_plus
# make install
```

Once this has been compiled and installed, copy the default configuration to the /etc directory and open it up in your favorite editor. The following sections will go through each part of the configuration in detail:

```
#####
# Default Config
#####

# Key, very important
key = thisshouldbealongrandomstring

# Use /etc/passwd file to do authentication

default authentication = file /etc/passwd

# Accounting records log file
```

```
accounting file = /var/log/tacacs/tac_acc.log
```

The first configuration line is the “key” directive, which specifies the shared secret that will be used between all of your devices and the TACACS+ server. It needs to be the same on both the devices and the server in order for TACACS+ to work. The next line tells the TACACS+ server where to look for authentication, in this case we tell it to look to the local UNIX /etc/passwd file. You can also point your authentication at a RADIUS or LDAP server using additional modules. Finally we tell the TACACS+ server where to write the accounting logs, which we will setup to log command execution and logon/logoffs to all of our devices.

Next we will configure users and groups:

```
#####
# Group Definitions
#####

group = netadmin {
    default service = permit
    service = exec {
        priv-lvl = 15
    }
}

group = users {
    default service = deny
    service = exec {
        priv-lvl = 1
    }
}
```

To keep things simple we will use two groups, a privileged group and a non-privileged group. The “netadmin” group above will contain all of the network administrators who need enable access to the devices, and is granted privilege level 15, which is the highest level of access on Cisco devices (equivalent to “root” on a Unix-based system, or “administrator” on a windows-based system). When these users login they will be presented with the enable prompt immediately (Router#) and have the ability to enter privileged commands (i.e. “show running-config”). The group “users” will get privilege level 1, which only allows them to enter basic commands which are as follows:

access-enable	Create a temporary Access-List entry
clear	Reset functions
connect	Open a terminal connection
disable	Turn off privileged commands
disconnect	Disconnect an existing network connection
enable	Turn on privileged commands

exit	Exit from the EXEC
help	Description of the interactive help system
lock	Lock the terminal
login	Log in as a particular user
logout	Exit from the EXEC
name-connection	Name an existing network connection
ping	Send echo messages
rcommand	Run command on remote switch
resume	Resume an active network connection
show	Show running system information
ssh	Open a secure shell client connection
systat	Display information about terminal lines
telnet	Open a telnet connection
terminal	Set terminal line parameters
traceroute	Trace route to destination
tunnel	Open a tunnel connection
where	List active connections

**WARNING:** Although these are the only commands listed when querying the router in privilege level 1, the user has the ability to run other commands. For example in privilege level 1 you can run the “show ip route” and “show ip access-lists” commands. These alone give away critical information about the router, and more importantly the network topology. You can create custom filters to prevent users from running these commands, which we will cover in subsequent sections.

Next we will configure users:

```
#####
# Netadmin users
#####

user = bsmith {
    member = netadmin
}

#####
# Unprivileged Users
#####

user = sjones {
    member = users
    cmd = show {
        deny ip
        deny tacacs
        permit .*
    }
    cmd = quit {
        permit .*
    }
}
```

```
}  
cmd = exit {  
    permit .*  
}  
cmd = logout {  
    permit .*  
}  
cmd = ssh {  
    permit 192\.168\.1\.[0-9]+  
    deny .*  
}  
}
```

In the first section above we place the user “bjones” in the netadmins group, which grants privilege level 15 on all the network devices. “bjones” also exists in the local Unix /etc/passwd file, which needs to be the case for all users whom you wish to grant access to via TACACS+. The next section is our unprivileged user “sjones”, in which we grant privilege level 1. The users group in the TACACS+ server has a default deny statement, so by default no commands are allowed. We allow users to run almost every “show” command for debugging purposes, but do not let them see any IP or TACACS+ information. We also only let them SSH to machines on the 192.168.1.0/24 subnet, using a regular expression in the SSH section. Finally we do allow them to exit from the router, using any of the three commands that allow you to logoff. You will have to modify this section to fit your needs.

Once you have the configuration file adjusted to fit your needs you can start the TACACS+ server as follows:

```
# /usr/local/sbin/tac_plus -C /etc/tac_plus.cfg -d 248
```

The “-C” options tells the daemon where the configuration file is located, and the “-d 248” is the debugging level, which we set to 248, giving us plenty of information in the logs (see the tac\_plus man page for more details).

You should create user accounts on this system and add them to the tac\_plus.cfg file. Also, it is recommended that you have at least two TACACS+ servers and use rsync to synchronize the user accounts and TACACS+ configuration.

## Configuring IOS

---

The configuration that we will step through in this section can be added to all of your IOS based network devices (primarily routers and switches). Be certain that you add the commands in the order they appear here, otherwise you can very easily lock yourself out of the device (not that I ever did that).

The first step is to setup the TACACS+ servers:

```
tacacs-server host 192.168.1.5
tacacs-server host 192.168.1.6
tacacs-server key thisshouldbealongrandomstring
```

The device will use the first server in the list if it is available, then the second, and so on. The key must be set to the same value as on the TACACS+ server. The next command creates a local user, called "admin", with the privilege level of 15, and of course a good password:

```
username admin privilege 15 password agoodpasswordstring
```

This is the username/password pair that you will need to use if the TACACS+ server is unavailable. We need this local account in order to provide remote access via SSH only. Normally we default back to the enable password, but SSH requires a username and password pair, so the enable password does not work in this situation. Providing this local account will allow us to turn off telnet access to the device while still allowing access if the TACACS+ server is unavailable.

The AAA configuration is as follows:

```
aaa new-model
aaa authentication login default group tacacs+ local enable
aaa authorization exec default group tacacs+ local none
aaa authorization commands 0 default group tacacs+ local none
aaa authorization commands 1 default group tacacs+ local none
aaa authorization commands 15 default group tacacs+ local none
aaa accounting exec default start-stop group tacacs+
aaa accounting commands 0 default start-stop group tacacs+
aaa accounting commands 1 default start-stop group tacacs+
aaa accounting commands 15 default start-stop group tacacs+
```

The above configuration tells the device how to handle all interactive user logins and what the user can do once logged in. The first line simply creates a new AAA schema, allowing you to enter all of the commands that follow. The authentication line tells the device that whenever a user logs in it will validate the username and password against the TACACS+ server first, then look to a local username/password database, and finally default to the enable password. The only time it will default to the enable password is if the local username is not setup. The command and exec authorization works the same way, except if TACACS+ is not available the device will not perform any command or exec authorization. The last few lines will log all command activity on the device to the TACACS+ server. Next we will configure SSH.



SSH should be configured on all your Cisco devices that will support it. The device will need to be running IOS version 12.1(1)T or later with 3DES to support this feature. To enable it, do the following:

```
ip domain-name mydomain.com
crypto key generate rsa
```

When you run the second command you will be prompted to enter a key size. Be certain to enter a key size of 1024 bits or greater. Once this is complete you will need to configure your terminal lines to use SSH:

```
line vty 0 15
  transport input ssh
```

The above configuration will disable telnet and only allow SSH connections to the router for remote access.

### Further Recommendations

---

Below is a list of additional configuration that should be in place that complements the concepts described in this paper. Refer to “Securing Cisco Routers: A Step-By-Step Guide” for more detailed information on securing your Cisco IOS-based devices.

- All network devices should have an ACL that only allows network management workstations access to the device
- The TACACS+ server should be behind a firewall that only allows TACACS+ traffic (TCP port 49) in from all network devices.
- You can synchronize the user accounts easily using the following script:

```
#!/bin/sh
  while true; do
    for f in /etc/passwd /etc/shadow; do
      for h in second_auth_server_name ; do
        rsync -azSHe ssh $f $h:$f
      done
    done
    sleep 60
  done
```

The above script needs to be run on your primary authentication server in the background. Be certain to replace the string “second\_auth\_server\_name” with the hostname of your secondary authentication server and ensure that the proper hostname resolution is in place.

- You can synchronize the TACACS+ configuration using a similar script.

- Use the port security feature and hard coded MAC addresses on switches and routers to help prevent against man-in-the-middle attacks that exploit ARP spoofing tactics.

## Configurations

---

### TACACS+ Server Configuration:

```
#####
# Default Config
#####

# Key, very important
key = thisshouldbealongrandomstring

# Use /etc/passwd file to do authentication

default authentication = file /etc/passwd

# Accounting records log file

accounting file = /var/log/tac_acc.log

#####
# Group Definitions
#####

group = netadmin {
    default service = permit
    service = exec {
        priv-lvl = 15
    }
}

group = users {
    default service = deny
    service = exec {
        priv-lvl = 1
    }
}

#####
# Netadmin users
#####

user = bsmith {
    member = netadmin
}
```

```
#####
# Unprivileged Users
#####

user = sjones {
    member = users
    cmd = show {
        deny ip
        deny tacacs
        permit .*
    }
    cmd = quit {
        permit .*
    }
    cmd = exit {
        permit .*
    }
    cmd = logout {
        permit .*
    }
    cmd = ssh {
        permit 192\.168\.1\.[0-9]+
        deny .*
    }
}
}
```

### Cisco IOS Configuration:

```
tacacs-server host 192.168.1.5
tacacs-server host 192.168.1.6
tacacs-server key thisshouldbealongrandomstring
!
username admin privilege 15 password agoodpasswordstring
!
aaa new-model
aaa authentication login default group tacacs+ local enable
aaa authorization exec default group tacacs+ local none
aaa authorization commands 0 default group tacacs+ local none
aaa authorization commands 1 default group tacacs+ local none
aaa authorization commands 15 default group tacacs+ local none
aaa accounting exec default start-stop group tacacs+
aaa accounting commands 0 default start-stop group tacacs+
aaa accounting commands 1 default start-stop group tacacs+
aaa accounting commands 15 default start-stop group tacacs+
!
ip domain-name mydomain.com
crypto key generate rsa
!
line vty 0 15
transport input ssh
```

```
!  
end
```

## References

---

<http://www.gazi.edu.tr/tacacs/> - TACACS+ Homepage, modified version of Cisco's freeware TACACS+ implementation

[http://www.gazi.edu.tr/tacacs/docs/users\\_guide.txt](http://www.gazi.edu.tr/tacacs/docs/users_guide.txt) - TAC\_PLUS Developer's Kit vF4.0.2.alpha

<http://www.cisco.com/warp/customer/707/ssh.shtml> - Configuring Secure Shell on Routers and Switches Running Cisco IOS

[http://www.cisco.com/en/US/tech/tk583/tk547/technologies\\_tech\\_note09186a008009465c.shtml](http://www.cisco.com/en/US/tech/tk583/tk547/technologies_tech_note09186a008009465c.shtml) - How to Assign Privilege Levels with TACACS+ and RADIUS

Securing Cisco Routers: Step-By-Step, Joshua L. Wright and John N. Stewart, SANS Press, August 2002

([http://store.sans.org/store\\_item.php?item=70&sans\\_store=6c8168578dfa75d9b21a67a028403792](http://store.sans.org/store_item.php?item=70&sans_store=6c8168578dfa75d9b21a67a028403792))

[http://www.cisco.com/en/US/tech/tk583/tk617/technologies\\_security\\_advisory09186a00800b168e.shtml](http://www.cisco.com/en/US/tech/tk583/tk617/technologies_security_advisory09186a00800b168e.shtml) - Cisco Security Advisory: Multiple SSH Vulnerabilities

[http://www.cisecurity.org/bench\\_cisco.html](http://www.cisecurity.org/bench_cisco.html) - The Center for Information Security Router Audit Tool (RAT), George Jones

## Special Thanks

---

Joshua Wright, for editing this paper and encouraging me to write it, David Ball, Cisco TAC engineer who was especially helpful with the IOS configuration, and Don Wright for his help with testing the configurations and editing.



# Upcoming SANS Training

[Click Here for a full list of all Upcoming SANS Events by Location](#)

SANS Paris June 2018	Paris, FR	Jun 25, 2018 - Jun 30, 2018	Live Event
SANS Minneapolis 2018	Minneapolis, MNUS	Jun 25, 2018 - Jun 30, 2018	Live Event
SANS Vancouver 2018	Vancouver, BCCA	Jun 25, 2018 - Jun 30, 2018	Live Event
SANS London July 2018	London, GB	Jul 02, 2018 - Jul 07, 2018	Live Event
SANS Cyber Defence Singapore 2018	Singapore, SG	Jul 09, 2018 - Jul 14, 2018	Live Event
SANS Charlotte 2018	Charlotte, NCUS	Jul 09, 2018 - Jul 14, 2018	Live Event
SANSFIRE 2018	Washington, DCUS	Jul 14, 2018 - Jul 21, 2018	Live Event
SANS Cyber Defence Bangalore 2018	Bangalore, IN	Jul 16, 2018 - Jul 28, 2018	Live Event
SANS Pen Test Berlin 2018	Berlin, DE	Jul 23, 2018 - Jul 28, 2018	Live Event
SANS Riyadh July 2018	Riyadh, SA	Jul 28, 2018 - Aug 02, 2018	Live Event
Security Operations Summit & Training 2018	New Orleans, LAUS	Jul 30, 2018 - Aug 06, 2018	Live Event
SANS Pittsburgh 2018	Pittsburgh, PAUS	Jul 30, 2018 - Aug 04, 2018	Live Event
SANS San Antonio 2018	San Antonio, TXUS	Aug 06, 2018 - Aug 11, 2018	Live Event
SANS August Sydney 2018	Sydney, AU	Aug 06, 2018 - Aug 25, 2018	Live Event
SANS Boston Summer 2018	Boston, MAUS	Aug 06, 2018 - Aug 11, 2018	Live Event
Security Awareness Summit & Training 2018	Charleston, SCUS	Aug 06, 2018 - Aug 15, 2018	Live Event
SANS Hyderabad 2018	Hyderabad, IN	Aug 06, 2018 - Aug 11, 2018	Live Event
SANS New York City Summer 2018	New York City, NYUS	Aug 13, 2018 - Aug 18, 2018	Live Event
SANS Northern Virginia- Alexandria 2018	Alexandria, VAUS	Aug 13, 2018 - Aug 18, 2018	Live Event
SANS Krakow 2018	Krakow, PL	Aug 20, 2018 - Aug 25, 2018	Live Event
SANS Chicago 2018	Chicago, ILUS	Aug 20, 2018 - Aug 25, 2018	Live Event
Data Breach Summit & Training 2018	New York City, NYUS	Aug 20, 2018 - Aug 27, 2018	Live Event
SANS Prague 2018	Prague, CZ	Aug 20, 2018 - Aug 25, 2018	Live Event
SANS Virginia Beach 2018	Virginia Beach, VAUS	Aug 20, 2018 - Aug 31, 2018	Live Event
SANS San Francisco Summer 2018	San Francisco, CAUS	Aug 26, 2018 - Aug 31, 2018	Live Event
SANS Copenhagen August 2018	Copenhagen, DK	Aug 27, 2018 - Sep 01, 2018	Live Event
SANS SEC504 @ Bangalore 2018	Bangalore, IN	Aug 27, 2018 - Sep 01, 2018	Live Event
SANS Wellington 2018	Wellington, NZ	Sep 03, 2018 - Sep 08, 2018	Live Event
SANS Amsterdam September 2018	Amsterdam, NL	Sep 03, 2018 - Sep 08, 2018	Live Event
SANS Tokyo Autumn 2018	Tokyo, JP	Sep 03, 2018 - Sep 15, 2018	Live Event
SANS Tampa-Clearwater 2018	Tampa, FLUS	Sep 04, 2018 - Sep 09, 2018	Live Event
SANS MGT516 Beta One 2018	Arlington, VAUS	Sep 04, 2018 - Sep 08, 2018	Live Event
SANS Cyber Defence Canberra 2018	OnlineAU	Jun 25, 2018 - Jul 07, 2018	Live Event
SANS OnDemand	Books & MP3s OnlyUS	Anytime	Self Paced