



Interested in learning  
more about security?

# SANS Institute InfoSec Reading Room

This paper is from the SANS Institute Reading Room site. Reposting is not permitted without express written permission.

## Auditing Windows installed software through command line scripts

The 20 Critical Controls provides guidance on managing and securing our networks. The second control states there should be a software inventory of the products for all devices within the infrastructure. Within this paper, the auditor will be enabled to compare Windows system baseline information against the currently installed software configuration. Command line tools utilized will be discussed and scripts provided to simplify and automate these tasks.

Copyright SANS Institute  
Author Retains Full Rights



AD

# *Auditing Windows installed software through command line scripts*

*GIAC (GSNA) Gold Certification*

Author: Jonathan Risto, jonathan.risto@hotmail.com

Advisor: Kees Leune

Accepted: September 7, 2016

## Abstract

The 20 Critical Controls provides guidance on managing and securing our networks. The second control states there should be a software inventory of the products for all devices within the infrastructure. Within this paper, the auditor will be enabled to compare Windows system baseline information against the currently installed software configuration. Command line tools utilized will be discussed and scripts provided to simplify and automate these tasks.

# 1. Introduction

For any computer system, to successfully audit the software installed two items are required. The first being a baseline of the approved software available on the system in question, and the second being an accurate and current listing of programs for the same computer. While this is an easy statement to make, it is significantly harder to accomplish.

## 1.1. Control 2 – overview

The Critical Security Controls, Control 2 require an organization to “Actively manage (inventory, track, and correct) all software on the network so that only authorized software is installed and can execute, and that unauthorized and unmanaged software is found and prevented from installation or execution” (Center for Internet Security, 2015). Within control 2, subcontrol 2.3 states an organization needs to deploy a software inventory system that tracks the approved software installations and notifies of any deviations from the approved baseline (Center for Internet Security, 2015).

However, there are challenges faced by all IT Security groups, budgets being one of them. With unlimited funds, it would be easy to implement a commercial solution that could easily resolve this control and provide the required details. However, resources are not unlimited, and not all organizations, especially those in the small and medium markets, cannot always afford commercial solutions.

Another limiting factor for the majority of organizations is the lack of qualified resources (Security Magazine, 2012). Without the resources to manage new software installations, organizations either install a solution that is not used or more likely, are unable to install due to this limitation.

## 2. Auditing the control

To successfully audit the software inventory control, the first item that is needed is a reliable baseline of the system in question. Without accurately knowing what software is supposed to be on the system being audited, it is impossible to know if there are any changes from this baseline.

### 2.1. Collecting the information

There are numerous means available to collect the information needed. Commercial tools and publically available methods are accessible to the reader. However, for this work, a public and freely available collection process was necessary to ensure relevance and accessibility for the majority of users. To this end, the previously published work on collecting the software inventory on Windows systems was chosen. In this paper, free tools and command line methods are presented, as well as automated scripts are provided to the reader to automate the process are provided (Risto, 2016).

These scripts provide the baseline information for the systems under audit. All three collection methods were used to test the auditing and automation provided in this work.

## 3. Comparisons with PowerShell

PowerShell was created by Microsoft to assist with the management of operating system. It provides access to built-in commands, called cmdlets, grouped into modules within PowerShell. An in-depth description of PowerShell is outside the scope of this paper. However, Microsoft has a significant amount of information on PowerShell posted at (Microsoft, 2013).

Within PowerShell, one of the cmdlets that is available is Compare-Object, which is the command that used in this work. Detailed information on the command and all the options available can be found at both (SS64, 2015) and (Microsoft, 2016). For a basic comparison of two items, only the two elements to be compared are needed. The Compare-Object documentation calls these the referenceObject and the differenceObject

Jonathan Risto;jonathan.risto@hotmail.com


(Microsoft, 2016). Both of these need to be PowerShell reference objects. The command required to run the Compare-Object command is as follows:

```
Compare-Object $referenceObject $differenceObject
```

For this work, we require the Compare-Object command to compare two files. However, within the cmdlet, there is no direct means to compare two files. However, within PowerShell, there is another cmdlet that reads the contents of a file, which is the Get-Content cmdlet. This cmdlet permits the reading of a file, among other functions (Microsoft, 2016a). Using this functionality within the Compare-Object command is completed as follows:

```
Compare-Object $(Get-Content c:\temp\software_baseline.txt) $(Get-Content c:\temp\new_software_listing.txt)
```

Within this command, the `$(Get-Content c:\temp\software_baseline.txt)` portion reads in the contents of the `c:\temp\software_baseline.txt` file and uses this as the reference object for the command. In a similar fashion, the `$(Get-Content c:\temp\new_software_listing.txt)` section of the command reads the content of the `c:\temp\new_software_listing.txt` and uses this as the difference object. When the command is run, the output is displayed on the screen, and it is similar to that shown in Figure 1. More details and information on the format of this output is contained in Section 3.1 Compare-Object output format.

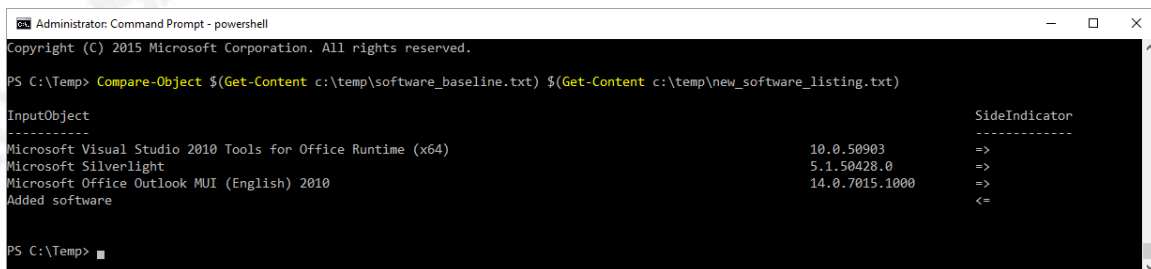

```
Administrator: Command Prompt - powershell
Copyright (C) 2015 Microsoft Corporation. All rights reserved.


PS C:\Temp> Compare-Object $(Get-Content c:\temp\software_baseline.txt) $(Get-Content c:\temp\new_software_listing.txt)

InputObject                                                                                               SideIndicator
-----
Microsoft Visual Studio 2010 Tools for Office Runtime (x64)                                         10.0.50903      =>
Microsoft Silverlight                                                                                   5.1.50428.0     =>
Microsoft Office Outlook MUI (English) 2010                                                           14.0.7015.1000  =>
Added software                                                                                           14.0.7015.1000  <=&#x2D;
```

Figure 1 - Compare-Object output example

### 3.1. Compare-Object output format

When the PowerShell compare-object cmdlet is run, it provides an output that details differences between the two files as well as which file contained the line. The first portion of a baseline file is shown in Figure 2.

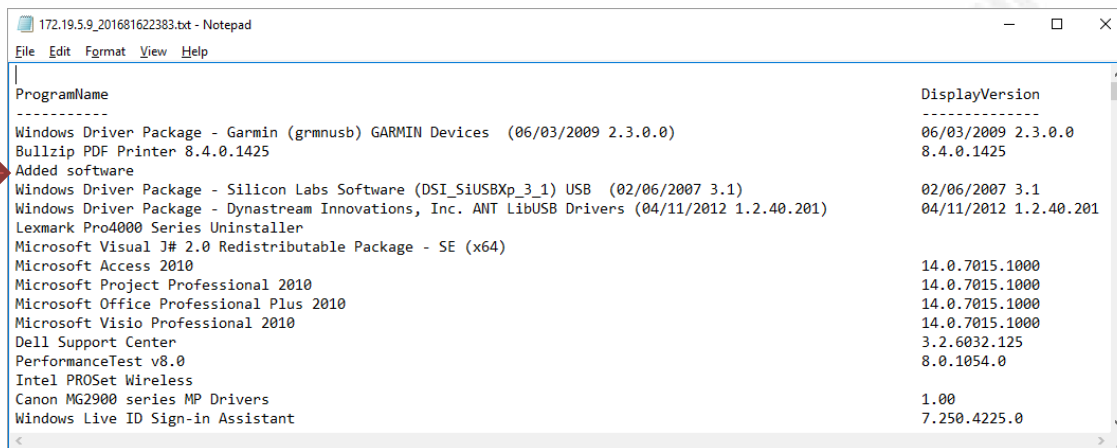


```

172.19.5.9_201681622383.txt - Notepad
File Edit Format View Help
-----
ProgramName                               DisplayVersion
-----
Windows Driver Package - Garmin (grmnusb) GARMIN Devices (06/03/2009 2.3.0.0) 06/03/2009 2.3.0.0
Bullzip PDF Printer 8.4.0.1425           8.4.0.1425
Added software
Windows Driver Package - Silicon Labs Software (DSI_SiUSBp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
Windows Driver Package - Dynastream Innovations, Inc. ANT LibUSB Drivers (04/11/2012 1.2.40.201) 04/11/2012 1.2.40.201
Lexmark Pro4000 Series Uninstaller
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Access 2010                    14.0.7015.1000
Microsoft Project Professional 2010      14.0.7015.1000
Microsoft Office Professional Plus 2010  14.0.7015.1000
Microsoft Visio Professional 2010       14.0.7015.1000
Dell Support Center                      3.2.6032.125
PerformanceTest v8.0                   8.0.1054.0
Intel PROSet Wireless
Canon MG2900 series MP Drivers          1.00
Windows Live ID Sign-in Assistant       7.250.4225.0

```

Figure 2 - PowerShell installed software baseline file example

Figure 3 shows the currently installed software as saved when the script was run. As you can note, both are very similar in listed software and version numbers of the portion of the file shown.

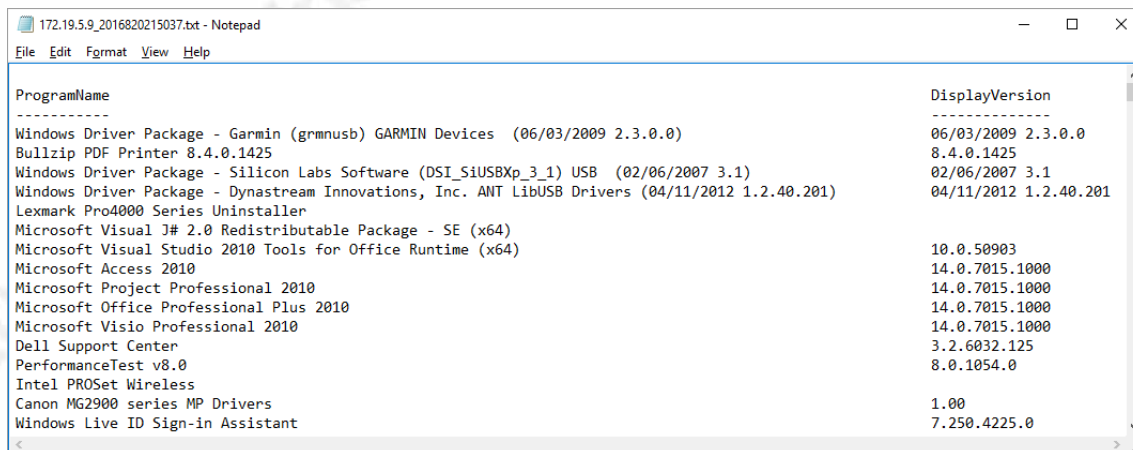

```

172.19.5.9_2016820215037.txt - Notepad
File Edit Format View Help
-----
ProgramName                               DisplayVersion
-----
Windows Driver Package - Garmin (grmnusb) GARMIN Devices (06/03/2009 2.3.0.0) 06/03/2009 2.3.0.0
Bullzip PDF Printer 8.4.0.1425           8.4.0.1425
Windows Driver Package - Silicon Labs Software (DSI_SiUSBp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
Windows Driver Package - Dynastream Innovations, Inc. ANT LibUSB Drivers (04/11/2012 1.2.40.201) 04/11/2012 1.2.40.201
Lexmark Pro4000 Series Uninstaller
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Visual Studio 2010 Tools for Office Runtime (x64) 10.0.50903
Microsoft Access 2010                    14.0.7015.1000
Microsoft Project Professional 2010      14.0.7015.1000
Microsoft Office Professional Plus 2010  14.0.7015.1000
Microsoft Visio Professional 2010       14.0.7015.1000
Dell Support Center                      3.2.6032.125
PerformanceTest v8.0                   8.0.1054.0
Intel PROSet Wireless
Canon MG2900 series MP Drivers          1.00
Windows Live ID Sign-in Assistant       7.250.4225.0

```

Figure 3 - PowerShell current installed software example

To ensure that the new software inventory would include additional items that were not in the baseline, the line Added Software was inserted into the file, as highlighted in Figure 2 by the arrow on the left-hand side. This entry was added to show how the

Jonathan Risto;jonathan.risto@hotmail.com

comparison outputs information on a piece of software missing from the current inventory.

As well, three lines of software were deleted from this baseline file. The deleted lines were for the programs Microsoft Visual Studio 2010 Tools, Microsoft Silverlight, and Microsoft Office Outlook MUI (English) 2010. The deletion of these lines was done to show how the system outputs the information of new items in the current software inventory file.

An additional piece of software was updated on the system in question, to show how the comparison outputs information for a similar situation.

When the comparison is run within PowerShell, the output created looks analogous to the output in Figure 4. In this output, the PowerShell command provides the name and versions of each piece of software that is different in the baseline or current software inventory files. The cmdlet also provides a column for the title of SideIndicator; that shows, albeit somewhat cryptically, in which of the two files the changes are located.

InputObject		SideIndicator
Microsoft Visual Studio 2010 Tools for Office Runtime (x64)	10.0.50903	=>
Microsoft Silverlight	5.1.50428.0	=>
Microsoft Office Outlook MUI (English) 2010	14.0.7015.1000	=>
Dropbox	8.4.19	=>
Added software		<=
Dropbox	7.4.30	<=

Figure 4- PowerShell comparison output example

Within the sample output of Figure 4, the SideIndicator column contains either a => or a <= symbol. What these are cryptically detailing to the person running the script is that in the case of <=, that the line was only contained within the baseline file used in the comparison. If a => is shown, this means that the line is only contained within the current inventory file.

To be able to understand how the output relates back to situations outlined previously, some further analysis is needed. Four test cases are required. First, an application only appears in the baseline file. Secondly, software is only listed in the latest inventory file. Thirdly, a program exists in both files and is the same version number.

Jonathan Risto;jonathan.risto@hotmail.com

Moreover, lastly, a piece of software exists in both files but with different version numbers in each file.


The first test case is illustrated in the output from the comparison by the added software depicted in Figure 2, with the arrow beside it. By adding a new line of this file, it is the equivalent of having a piece of software that appears only in the baseline file, our first test case. The results of this can be seen in the fifth line of Figure 4, where the Added Software is shown with an <= symbol. This symbol indicates that the filename is only found in the baseline file, and not the recently gathered inventory.

The second test case, information is only contained in the latest inventory file, is illustrated by the first three lines in Figure 4. These specific lines were deleted from the baseline file and therefore were only contained in the latest software inventory completed on the system. The output file lines show the => symbol, which graphically shows this information.

The third test case is trivial in nature, as there are numerous examples of this within the comparison files. As shown in Figures 2 and 3, multiple items appear in both files that are identical, and within the output file are not listed. So by having them listed in both files, the comparison operation does not include them in the output file.


The fourth test case is the most complex one. It requires the comparison to examine the entire entry of each line, not just a partial match of program names. An example of this is shown in Figure 5 and Figure 6. These two excerpts are from further down the baseline file and the current inventory file than previously shown. Both highlight that Dropbox exists in the files, but the version number is different. The comparison output shows this in lines four and six, with line 4 indicating the version associated with the current inventory with the symbol of => and line 6 indicating the version related to the baseline file, and provides the graphical indication of where the <= located this.



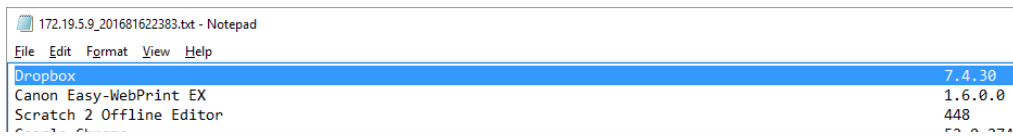

Software Name	Version
Dropbox	7.4.30
Canon Easy-WebPrint EX	1.6.0.0
Scratch 2 Offline Editor	448

Figure 5 – Dropbox software version in baseline file

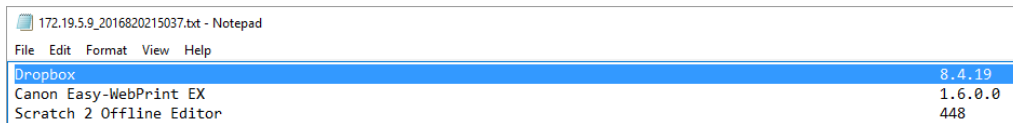

Software Name	Version
Dropbox	8.4.19
Canon Easy-WebPrint EX	1.6.0.0
Scratch 2 Offline Editor	448

Figure 6 – Dropbox software version in current inventory file

The comparison in test case four correctly identifies that there are differences in the files, and shows which difference is located in the correct files. In an audit, this would either highlight that the baseline file has not been kept updated, or that a piece of software has been upgraded without permission on the computer in question.

## 4. Comparisons through Windows command line

Within the Windows operating system components, there is a program `c:\windows\system32` directory call `fc.exe`. What this name is short for File Compare, and is detailed by Microsoft at (Microsoft, 2016b). The command has numerous options, but for this paper, minimal optional parameters are needed. By default, the program compares the two files as ASCII sources, which for this work is perfect. The only switch that used is the `/w` option.

The `/w` option instructs the program to compress any multiple whitespace characters that are found together and treat them as a single space, as well as ignore the whitespace at the beginning and the end of the file (Microsoft, 2016b). Given that the creation of the file is based on programs outside of the control of the user, it cannot be guaranteed how the formatting appears, nor if there are blank lines at the start and end of a file. With this option enabled, the issues and concerns regarding blank lines within the two comparison files are removed.


To run the command as needed for this paper, the following command is used:

Jonathan Risto; jonathan.risto@hotmail.com

```
fc /w c:\temp\software_baseline.txt c:\temp\new_software_listing.txt
```


in the above command, the `c:\temp\software_baseline.txt` specifies the location of file filename 1, which is the baseline file for the comparisons. The `c:\temp\new_software_list.txt` option specifies the location of filename 2, which is the current inventory file in this paper.

Once the command above is run, it generates an output similar to that shown in

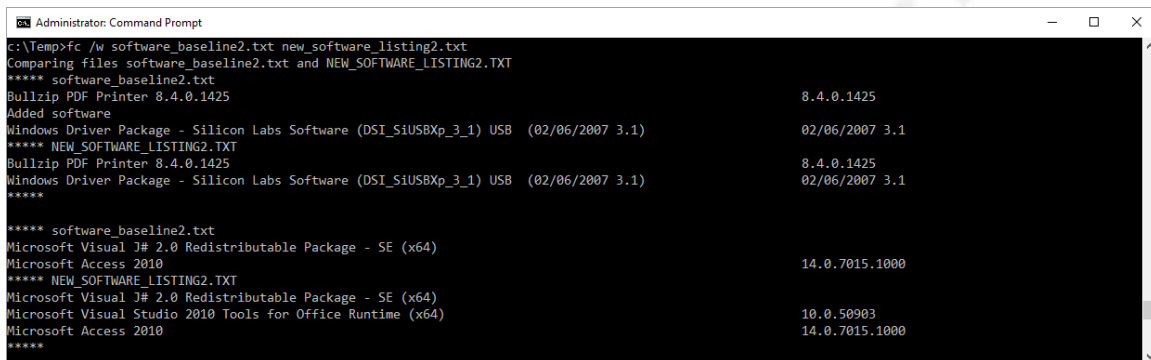

```
Administrator: Command Prompt
c:\Temp>fc /w software_baseline2.txt new_software_listing2.txt
Comparing files software_baseline2.txt and NEW_SOFTWARE_LISTING2.TXT
***** software_baseline2.txt
Bullzip PDF Printer 8.4.0.1425                8.4.0.1425
Added software
Windows Driver Package - Silicon Labs Software (DSI_S1USBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
***** NEW_SOFTWARE_LISTING2.TXT
Bullzip PDF Printer 8.4.0.1425                8.4.0.1425
Windows Driver Package - Silicon Labs Software (DSI_S1USBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
*****
***** software_baseline2.txt
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Access 2010                        14.0.7015.1000
***** NEW_SOFTWARE_LISTING2.TXT
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Visual Studio 2010 Tools for Office Runtime (x64) 10.0.50903
Microsoft Access 2010                        14.0.7015.1000
*****
```

Figure 7.

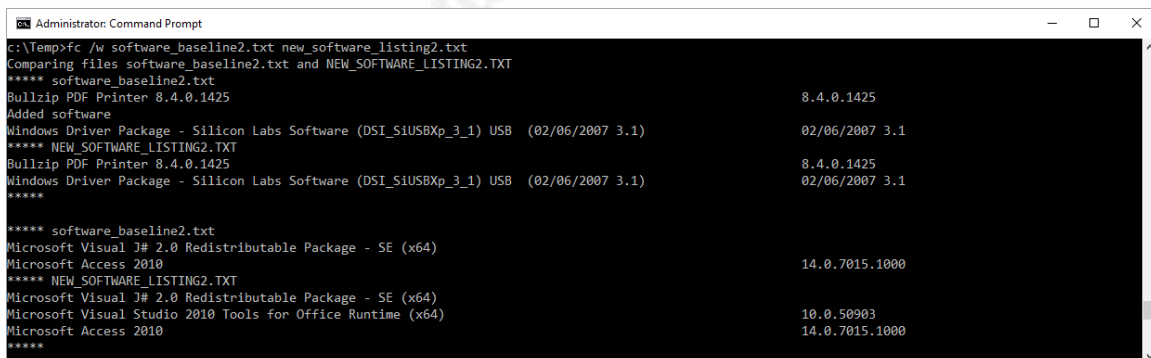

```
Administrator: Command Prompt
c:\Temp>fc /w software_baseline2.txt new_software_listing2.txt
Comparing files software_baseline2.txt and NEW_SOFTWARE_LISTING2.TXT
***** software_baseline2.txt
Bullzip PDF Printer 8.4.0.1425                8.4.0.1425
Added software
Windows Driver Package - Silicon Labs Software (DSI_S1USBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
***** NEW_SOFTWARE_LISTING2.TXT
Bullzip PDF Printer 8.4.0.1425                8.4.0.1425
Windows Driver Package - Silicon Labs Software (DSI_S1USBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
*****
***** software_baseline2.txt
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Access 2010                        14.0.7015.1000
***** NEW_SOFTWARE_LISTING2.TXT
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Visual Studio 2010 Tools for Office Runtime (x64) 10.0.50903
Microsoft Access 2010                        14.0.7015.1000
*****
```

Figure 7 - Output example of the fc.exe command


The details regarding how to decipher this output are found in Section 4.1 `fc.exe` Output format.

Jonathan Risto; jonathan.risto@hotmail.com

## 4.1. fc.exe Output format

Once the `fc.exe` command has been run, when differences are found within the files, it generates an output similar to that seen in Figure 8. This output was generated by running the following command:

```
fc /w software_baseline2.txt new_software_listing2.txt
```

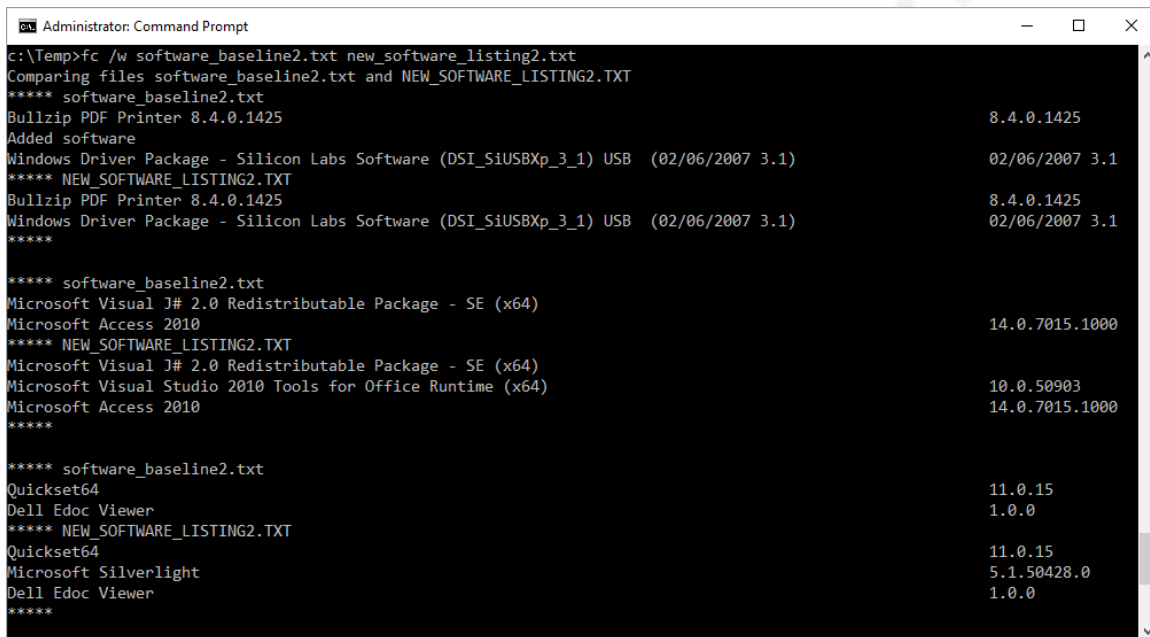


```
Administrator: Command Prompt
c:\Temp>fc /w software_baseline2.txt new_software_listing2.txt
Comparing files software_baseline2.txt and NEW_SOFTWARE_LISTING2.TXT
***** software_baseline2.txt
Bullzip PDF Printer 8.4.0.1425                               8.4.0.1425
Added software
Windows Driver Package - Silicon Labs Software (DSI_SiUSBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
***** NEW_SOFTWARE_LISTING2.TXT
Bullzip PDF Printer 8.4.0.1425                               8.4.0.1425
Windows Driver Package - Silicon Labs Software (DSI_SiUSBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
*****

***** software_baseline2.txt
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Access 2010                                       14.0.7015.1000
***** NEW_SOFTWARE_LISTING2.TXT
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Visual Studio 2010 Tools for Office Runtime (x64) 10.0.50903
Microsoft Access 2010                                       14.0.7015.1000
*****

***** software_baseline2.txt
Quickset64                                                   11.0.15
Dell Edoc Viewer                                             1.0.0
***** NEW_SOFTWARE_LISTING2.TXT
Quickset64                                                   11.0.15
Microsoft Silverlight                                       5.1.50428.0
Dell Edoc Viewer                                             1.0.0
*****
```

Figure 8 - fc.exe output example

Some of the contents of `software_baseline2.txt` are shown in Figure 9. This picture is very similar to Figure 2, however, in this case, the file is an ASCII file, as it was processed through the `type` command before being displayed. This filtering was done to ensure that no Unicode characters were present in the file. Similar actions were taken to create the file `c:\temp\new_software_listing2.txt`, which is shown in Figure 10.

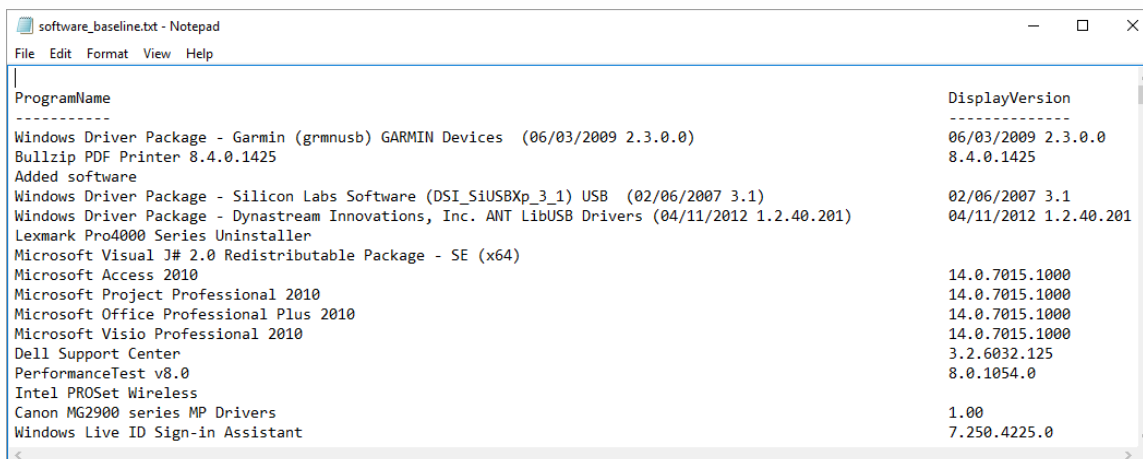


```

ProgramName                                     DisplayVersion
-----
Windows Driver Package - Garmin (grmnusb) GARMIN Devices (06/03/2009 2.3.0.0) 06/03/2009 2.3.0.0
Bullzip PDF Printer 8.4.0.1425                8.4.0.1425
Added software
Windows Driver Package - Silicon Labs Software (DSI_SiUSBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
Windows Driver Package - Dynastream Innovations, Inc. ANT LibUSB Drivers (04/11/2012 1.2.40.201) 04/11/2012 1.2.40.201
Lexmark Pro4000 Series Uninstaller
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Access 2010                          14.0.7015.1000
Microsoft Project Professional 2010            14.0.7015.1000
Microsoft Office Professional Plus 2010       14.0.7015.1000
Microsoft Visio Professional 2010             14.0.7015.1000
Dell Support Center                            3.2.6032.125
PerformanceTest v8.0                          8.0.1054.0
Intel PROSet Wireless
Canon MG2900 series MP Drivers                 1.00
Windows Live ID Sign-in Assistant             7.250.4225.0

```

Figure 9 - Contents of software\_inventory2.txt file

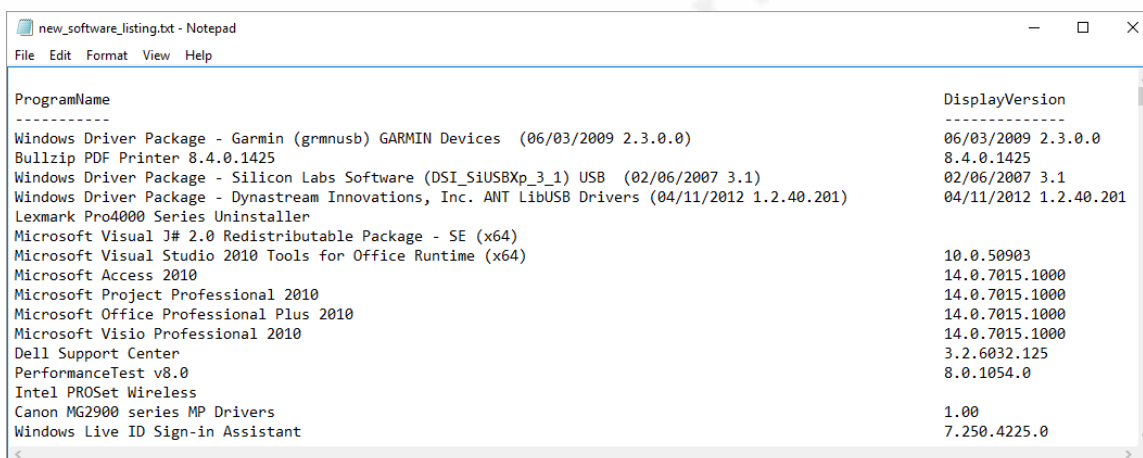

```

ProgramName                                     DisplayVersion
-----
Windows Driver Package - Garmin (grmnusb) GARMIN Devices (06/03/2009 2.3.0.0) 06/03/2009 2.3.0.0
Bullzip PDF Printer 8.4.0.1425                8.4.0.1425
Windows Driver Package - Silicon Labs Software (DSI_SiUSBXp_3_1) USB (02/06/2007 3.1) 02/06/2007 3.1
Windows Driver Package - Dynastream Innovations, Inc. ANT LibUSB Drivers (04/11/2012 1.2.40.201) 04/11/2012 1.2.40.201
Lexmark Pro4000 Series Uninstaller
Microsoft Visual J# 2.0 Redistributable Package - SE (x64)
Microsoft Visual Studio 2010 Tools for Office Runtime (x64) 10.0.50903
Microsoft Access 2010                          14.0.7015.1000
Microsoft Project Professional 2010            14.0.7015.1000
Microsoft Office Professional Plus 2010       14.0.7015.1000
Microsoft Visio Professional 2010             14.0.7015.1000
Dell Support Center                            3.2.6032.125
PerformanceTest v8.0                          8.0.1054.0
Intel PROSet Wireless
Canon MG2900 series MP Drivers                 1.00
Windows Live ID Sign-in Assistant             7.250.4225.0

```

Figure 10- Contents of the new\_software-listing.txt file

When the fc.exe program finds a difference between two items it is comparing, it lists the differences discovered in the two files, in a somewhat confusing fashion. In Figure 8, it lists as one of the first lines

```
***** software_baseline2.txt
```

This wording indicates the file from which that the lines come. Next is a listing of items from the file. In this example, it is the following:

```

Bullzip PDF Printer                8.4.0.1425
Added software
Windows Driver Package - Silicon Labs Software (DSI_SiUSBXp_3_1) USB
(02/06/2007 3.1)                   02/06/2007 3.1

```

Jonathan Risto;jonathan.risto@hotmail.com

This listing shows the program names from the file, as well as the version numbers in two columns. The reason these items are listed is that there was a difference between this listing and the listing in the compared listing.

Next, the output lists the next file used in the comparison, in this case, the file shows the following \*\*\*\*\* NEW\_SOFTWARE\_LISTING2.TXT. The lines that follow this show the lines from the file that differ from the lines in the baseline file. In this example, it shows

```
Bullzip PDF Printer                8.4.0.1425
Windows Driver Package - Silicon Labs Software (DSI_SiUSBXp_3_1) USB
(02/06/2007 3.1)                   02/06/2007 3.1
```

The difference in the two listings is that there is an additional line in the baseline file. It is the line of Added Software. The fc program lists the relevant sections of each file, and the reader is left to see what the difference is. The same format is repeated for each difference found in the files, in the same format. At the end of each listing of, the program places \*\*\*\*\* on a new line to show this is the end of the section in question.

## 5. Automation - scripting it all together

The items that have been discussed in sections 3 and 4 of this paper outline the commands and how they work, but those commands as shown are run in isolation and do not automate the control in any way. It is excellent to have a means that can perform the work for the administrator, but what is needed is a simple way to have the functionality executed by an administrator. As part of this paper, two scripts have been created, one a PowerShell script and one a command line batch script.

Jonathan Risto;jonathan.risto@hotmail.com

## 5.1. PowerShell script

PowerShell has many features and commands available within it that help simplify scripting in that language. From simple comparisons to checking the existence of a file, their presence contribute to improving the value and use of the script created.

The PowerShell script is provided in Appendix B in its entirety and is not reproduced here. In this section, an overview of the functionality that is used within the script is detailed.

When the script runs, the first thing it asks for input is the baseline file location. Once this information is entered, the script checks to ensure that file exists. This check is done using the *if (![System.IO.File]::Exists(\$orig\_file))* commands as shown on line 5 of the script. This statement calls the built-in function and method to check if the file entered by the user exists.

If the file does not exist, the program then enters the *do* loop in line 8 and informs the user that the file as entered does not exist, and asks for the filename again. A valid filename must be provided to exit the loop.

Once a valid filename has been provided, the script continues and asks for the collection method desired. The choice should be the same way as the baseline file was created. If not, a comparison between the two files is similar to comparing an apple and an orange. The program checks to ensure that a valid choice has been entered, and if not, it goes into the loop on line 19 and informs the user of a bad entry and stays in that loop until a valid entry is detected.

Once the method is chosen, the program runs the correct script as discussed in Section 2.1. Within each of scripts, the user is requested to enter the IP address for the system being audited to collect the current information from that system. This information is stored in the *c:\temp* directory.

The script then, in lines 41 thru 43 determines what the newest file is within the *c:\temp* directory, and stores this information. Given that the program just saved out the latest information from running the *wmic*, PowerShell or batch script, this is the most up-to-date information on the system being audited.

Jonathan Risto;jonathan.risto@hotmail.com

At this point, the script asks for where the output from the comparison is to be stored. The comparison is then performed between the baseline file and the newly collected information, with the information stored at the input location. This comparison is performed using the

```
Compare-Object $(Get-Content $orig_file) $(Get-Content $new_filename) | out-file -  
filepath $out_file -append
```

command as discussed in Section 3. The output is the same as described in Section 3.1 and is stored where the user has specified.

## 5.2. Command line script

Windows batch line scripting provides the ability to run numerous commands together, while also some of the core functionality of if constructs, variables and goto statements.

Once run, the batch file asks where the baseline file is located, and checks to see that the entry provided was not blank. This test is performed at line 13 of the script in the if statement. If the entry was blank, the program goes back to the start and requests the information again. The if construct from lines 17 thru 27 checks to see if the entered file exists on the system. If it does, the program then jumps to the next section of the program. If not, the user is informed that the file entered does not exist, and is asked to provide the information again.

The script then asks what the collection method for the software inventory is (wmic, PowerShell or psinfo). Once the selection method is chosen, in lines 33 thru 42, the script jumps to the correct section based on the input of wmic, PowerShell or psinfo. If none of those values are entered, the script is at line 44, and inform the user that an invalid entry was performed, and goes back to line 30.

Once the script continues, it calls the correct collection script, as discussed in Section 2.1. Within each of scripts, the user is requested to enter the IP address for the system being audited to collect the current information from that system. This information is stored in the c:\temp directory.

Jonathan Risto;jonathan.risto@hotmail.com

Similar to the PowerShell script, this script, in line 78, checks for the most recent file in the c:\temp directory (the output location of the called script) and stores the latest filename for the comparison.

The location to store the comparison results is requested from the user in line 87. Before running the comparison, the script takes the two files being compared and ensures that there are no UNICODE characters in the files that may cause a problem in the fc program. This work is performed in lines 92 and 93 of the script. The reason for this is that the output from wmic is stored in UNICODE format, while the output from psinfo is not. The commands utilized have no impact on the output from psinfo but place the wmic output in a format that the fc command can use.

The comparison is run using the command `fc /w %orig_file%.v2 %new_file%.v2`. This comparison is performed on line 97 of the script. It is performed on the temporary files, indicated by the v2, instead of the original files as outlined above. The script then cleans up the temporary files and informs the user that the output is saved to the specified location.

The format and details of the comparison are the same as described in Section 4.1.

## 6. Conclusion

Auditing a computer system's software inventory is a complex task. It requires excellent documentation of the computer in question to understand what is approved to be installed on it. As well, it requires the current inventory to compare to the baseline, thus determining what has been modified from this approved baseline.

Auditing the system manually is possible, but a significant amount of time is needed to conduct a manual audit. Even by using the commands outlined in Sections 3 and 4, the ability to quickly verify numerous systems is limited by the capacity of the auditor to have access to the required inventories to compare.

It is a huge advantage for the auditor to automatically and swiftly review a system through automating the collection of the needed information, comparing the results and storing the results for offline analysis and inclusion in a report. A simple means that is

Jonathan Risto;jonathan.risto@hotmail.com



easily duplicated with minimal typing also aids in the reduction of errors from all involved parties.

The scripts also enable the administrator to make any changes by documenting them in detail. If desired it would even be possible to modify the scripts to accept any and all parameters as input, or to check multiple systems. Both of these examples would extend this work, but are beyond the scope of this paper.

This work has attempted to provide a simple yet practical means for collecting and required information from the computer being audited. At the same time, it has sought to make it easy for the auditor and system administrator to run the programs in question and interpret the results.

## References

- Center for Internet Security. (2015). *The CIS Critical Security Controls for Effective Cyber Defense*. Arlington: Center for Internet Security. Retrieved July 30, 2016
- Microsoft. (2013, October 17). *Microsoft.PowerShell.Core Module*. Retrieved August 15, 2016, from Microsoft Developer Network: <https://technet.microsoft.com/en-us/library/hh847840.aspx>
- Microsoft. (2016). *Using the Compare-Object Cmdlet*. Retrieved August 15, 2016, from Microsoft Technet: <https://technet.microsoft.com/en-us/library/ee156812.aspx>
- Microsoft. (2016a). *Get-Content*. Retrieved August 15, 2016, from Microsoft Developer Network: <https://technet.microsoft.com/en-us/library/hh849787.aspx>
- Microsoft. (2016b). *FC*. Retrieved August 15, 2016, from Windows XP Professional Product Documentation: <https://www.microsoft.com/resources/documentation/windows/xp/all/proddocs/en-us/fc.mspx?mfr=true>
- Risto, J. (2016, August 20). *Windows Installed Software Inventory*. Retrieved August 30, 2016, from SANS Reading Room: <https://www.sans.org/reading-room/whitepapers/critical/windows-installed-software-inventory-37252>
- Security Magazine. (2012, August 16). *Cyber Security -- Staffing*. Retrieved July 30, 2016, from Security Magazine: <http://www.securitymagazine.com/articles/83412-study--63-percent-of-companies--it-departments-are-understaffed>
- SS64. (2015). *Compare-Object*. Retrieved August 15, 2016, from SS64: <http://ss64.com/ps/compare-object.html>

## Appendix A

### Windows Batch file auditing

To run the verification batch file, run the following command at an administrative command prompt, assuming that the batch file is stored in the `c:\temp` directory.

```
C:\temp\audit_command_line.bat
```

There are no command line options required for this script. Details regarding the script and how it works are outlined in Section 5.2.

Jonathan Risto; [jonathan.risto@hotmail.com](mailto:jonathan.risto@hotmail.com)

```
1  COMMAND LINE SCRIPT LISTING – audit_command_line.bat
2
3  echo off
4  cls
5
6  :start
7  set /p orig_file=Enter the full path and name of the baseline file for the computer to be audited:
8  REM getting the baseline file
9
10 echo You entered %orig_file%
11 echo.
12
13 if "%~orig_file" == "" goto :start
14 REM if the file is blank, need to get a request again
15
16 if exist %orig_file% (
17     echo The file %orig_file% exists
18     goto :collection
19     REM Check to see if the file is there, if it is, allow things to continue
20
21 ) else (
22     echo The file %orig_file% doesn't exist. Please enter a valid filename.
23     echo.
24     goto :start
```

```
25         REM if the file does not exist, go back and ask again for the filename
26     )
27
28
29     :collection
30     set /p query_means=Enter the collection method you wish to use to audit the information (type one of psinfo, PowerShell or wmic)
31     if "%query_means%"=="psinfo" (
32         goto :psinfo
33     )
34     if "%query_means%"=="powershell" (
35         goto :powershell
36     )
37     if "%query_means%"=="wmic" (
38         goto :wmic
39     )
40     REM checking for valid inputs and then going to the right location
41
42     echo you didn't enter a valid entry, please try again.
43     goto :collection
44     REM no valid value, go back and ask again
45
46     :wmic
47     call c:\temp\wmic_query.bat
48     rem need to use call command to run a script from within a script
```

```
49     goto :compare
50
51     :powershell
52     powershell /executionpolicy bypass /file c:\temp\software_enumeration.ps1
53     goto :compare
54
55     :psinfo
56     call C:\temp\psinfo.bat
57     goto :compare
58
59     :compare
60
61     REM now that we have the two files, need to compare them
62     for /f "delims=|" %%l in ('dir "c:\temp\*.*" /b /o:d') do set new_file=c:\temp\%%l
63
64     REM above finds the most recent file written to the directory, as if using PowerShell or psinfo, we cannot guarantee what the name is.
65     REM dir /o:d shows files in order oldest first. last value output from the command would be the newest file. We store that value for use
66
67     REM now that we have the old file, and the new file is created, we can compare. We are using the Windows command line program FC
68
69     set /p out_file=Enter the output file name that you wish to store the comparison results in. Please enter full path (e.g.
70 C:\temp\comparison.txt)
71
72     REM creating the output file name to use in the next comma
```

```
73
74     >%out_file% (
75     type %orig_file% > %orig_file%.v2
76     type %new_file% > %new_file%.v2
77
78     REM ensure that the files do not have any UNICODE entries in them. WMIC output stores in UNICODE. This ensures we don't touch the
79 originals.
80
81     fc /w %orig_file%.v2 %new_file%.v2
82     )
83
84     del %new_file%.v2
85     del %orig_file%.v2
86     REM clean up the temp files before leaving the script
87
88     echo The comparison results are stored in %out_file%
89     REM above we open the output file first, and then run the command we want in that file. Easiest way to capture command outputs
```

## Appendix B

To invoke the PowerShell script, enter the following command at an administrative command prompt, assuming that the script has been stored in the c:\temp directory.

```
PowerShell /executionpolicy bypass /file c:\temp\audit_powershell.ps1
```

The above command utilizes the */executionpolicy bypass* option when invoking PowerShell to ensure that group policies preventing scripts to be run do not cause a problem. This override is only for this single instance of PowerShell and does not require any changes to the policy settings. However, it does require an administrative command shell.

The */file c:\temp\audit\_powershell.ps1* option instructs PowerShell to use the file specified and run the command contained therein.

Details on what happens within the script are provided in Section 5.1.



```
1 POWERSHELL SCRIPT LISTING – audit_powershell.ps1
2 $orig_file = read-host 'Enter the full path and name of the baseline file for the computer to be audited: '
3
4 #get baseline file name from user
5 if (![System.IO.File]::Exists($orig_file)) {
6     #check to see if the file exists. If it doesn't, loop till it does
7
8     do{
9         $orig_file = read-host 'File does not exist. Enter the full path and name of the baseline file for the computer to be audited: '
10    }
11    while (![System.IO.File]::Exists($orig_file))
12 }
13
14 #have a file that exists for a baseline.
15 $query_means = read-host 'Enter the collection method you wish to use to audit the information (type one of psinfo, powershell or wmic)'
16
17 if ($query_means -ne "wmic" -AND $query_means -ne "psinfo" -AND $query_means -ne "powershell")
18 {
19     do {
20         $query_means = read-host 'Invalid entry. Enter one of psinfo, powershell or wmic'
21     }
22     Until ($query_means -eq "wmic" -OR $query_means -eq "psinfo" -OR $query_means -eq "powershell")
23 }
24 #ask for the collection method. If the value is not entered correctly, loop until it is
```

```
25
26
27     if ($query_means -eq "wmic") {
28         cmd /c c:\temp\wmic_query.bat
29     }
30
31     if ($query_means -eq "powershell") {
32         invoke-expression -Command 'powershell /executionpolicy bypass /file c:\temp\software_enumeration.ps1'
33     }
34
35     if ($query_means -eq "psinfo") {
36         cmd /c c:\temp\psinfo.bat
37     }
38
39     # the above runs the proper commands depending on what the user has selected
40
41     $newest_file = Dir c:\temp\ | Sort CreationTime -Descending | Select Name -First 1
42     $new_filename = "c:\temp\"
43     $new_filename += $newest_file.name
44
45
46     # the above queries the directory where the files are stored, sorts by creation time and selects the newest one.
47     # the filename is stored in $newest_file.name location variable
48
```

```
49     $out_file= read-host 'Enter the output file name where you wish to store the comparison results. Please enter full path (e.g.
50 C:\temp\comparison.txt)'
51
52     # creating the output file name to use in the next commands
53
54     $temp1 = "baseline file "
55     $temp1 += $orig_file
56     $temp2 = "compare file "
57     $temp2 += $new_filename
58     $temp1 | out-file $out_file
59     $temp2 | out-file $out_file -append
60     #putting some details on the two files compared to the start of the output file
61
62     Compare-Object $(Get-Content $orig_file) $(Get-Content $new_filename) | out-file -filepath $out_file -append
63
64     #-append command used on outfile to not overwrite the existing file information we created above.
65
66     # run the compare-object commandlet to compare the two files. Output is redirected to the file the user entered
67
68     write-host 'The comparison file was saved at ' $out_file '!'
```



# Upcoming SANS Training

[Click Here for a full list of all Upcoming SANS Events by Location](#)

SANS Las Vegas 2018	Las Vegas, NVUS	Jan 28, 2018 - Feb 02, 2018	Live Event
Cyber Threat Intelligence Summit & Training 2018	Bethesda, MDUS	Jan 29, 2018 - Feb 05, 2018	Live Event
SANS Miami 2018	Miami, FLUS	Jan 29, 2018 - Feb 03, 2018	Live Event
SANS London February 2018	London, GB	Feb 05, 2018 - Feb 10, 2018	Live Event
SANS Scottsdale 2018	Scottsdale, AZUS	Feb 05, 2018 - Feb 10, 2018	Live Event
SANS SEC455: SIEM Design Beta One 2018	Arlington, VAUS	Feb 12, 2018 - Feb 13, 2018	Live Event
SANS Southern California- Anaheim 2018	Anaheim, CAUS	Feb 12, 2018 - Feb 17, 2018	Live Event
SANS Secure India 2018	Bangalore, IN	Feb 12, 2018 - Feb 17, 2018	Live Event
SANS Brussels February 2018	Brussels, BE	Feb 19, 2018 - Feb 24, 2018	Live Event
SANS Secure Japan 2018	Tokyo, JP	Feb 19, 2018 - Mar 03, 2018	Live Event
Cloud Security Summit & Training 2018	San Diego, CAUS	Feb 19, 2018 - Feb 26, 2018	Live Event
SANS Dallas 2018	Dallas, TXUS	Feb 19, 2018 - Feb 24, 2018	Live Event
SANS New York City Winter 2018	New York, NYUS	Feb 26, 2018 - Mar 03, 2018	Live Event
CyberThreat Summit 2018	London, GB	Feb 27, 2018 - Feb 28, 2018	Live Event
SANS London March 2018	London, GB	Mar 05, 2018 - Mar 10, 2018	Live Event
SANS Secure Singapore 2018	Singapore, SG	Mar 12, 2018 - Mar 24, 2018	Live Event
SANS Secure Osaka 2018	Osaka, JP	Mar 12, 2018 - Mar 17, 2018	Live Event
SANS San Francisco Spring 2018	San Francisco, CAUS	Mar 12, 2018 - Mar 17, 2018	Live Event
SANS Paris March 2018	Paris, FR	Mar 12, 2018 - Mar 17, 2018	Live Event
SANS Northern VA Spring - Tysons 2018	McLean, VAUS	Mar 17, 2018 - Mar 24, 2018	Live Event
SANS Munich March 2018	Munich, DE	Mar 19, 2018 - Mar 24, 2018	Live Event
SANS Pen Test Austin 2018	Austin, TXUS	Mar 19, 2018 - Mar 24, 2018	Live Event
ICS Security Summit & Training 2018	Orlando, FLUS	Mar 19, 2018 - Mar 26, 2018	Live Event
SANS Secure Canberra 2018	Canberra, AU	Mar 19, 2018 - Mar 24, 2018	Live Event
SANS Boston Spring 2018	Boston, MAUS	Mar 25, 2018 - Mar 30, 2018	Live Event
SANS 2018	Orlando, FLUS	Apr 03, 2018 - Apr 10, 2018	Live Event
SANS Abu Dhabi 2018	Abu Dhabi, AE	Apr 07, 2018 - Apr 12, 2018	Live Event
Pre-RSA&reg: Conference Training	San Francisco, CAUS	Apr 11, 2018 - Apr 16, 2018	Live Event
SANS Zurich 2018	Zurich, CH	Apr 16, 2018 - Apr 21, 2018	Live Event
SANS London April 2018	London, GB	Apr 16, 2018 - Apr 21, 2018	Live Event
SANS Dubai 2018	OnlineAE	Jan 27, 2018 - Feb 01, 2018	Live Event
SANS OnDemand	Books & MP3s OnlyUS	Anytime	Self Paced