



Interested in learning  
more about security?

# SANS Institute InfoSec Reading Room

This paper is from the SANS Institute Reading Room site. Reposting is not permitted without express written permission.

## System Identification for Vulnerability Assessment

An independent method of taking an inventory of the devices currently attached to your network must be developed in order to adequately secure the entire network. You must know what you are defending to adequately defend it. This paper is a description of one company's journey using existing software utilities to identify the hardware and software that placed their network at risk. The writer says: "I am hopeful that the tools and ideas used here will help others construct a suite of tools that suits their needs and wi..."

Copyright SANS Institute  
Author Retains Full Rights

AD



EMM Strategy on the right track?  
Know your security risks.

TAKE THE ASSESSMENT

# System identification for vulnerability assessment

By Michael C. Harris

Many sources exist within the security and hacking community that discuss knowing the enemy, but that is only half the equation. Many security gurus have forgotten that they must also know themselves. They must know the systems and resources they are to protect.

## Sun Tzu - Art of War



Sun Tzu said:

**Know not the other and know not yourself**  
**Every fight is certain defeat.**

**Know not the other and yet know yourself**  
**One victory for one defeat.**

**Know the other and know yourself**  
**Fight one hundred battles without danger.**

( <http://www.mailsbroadcast.com/the.artofwar.3.htm> ) (2)

### Reasons for creating the tools

One of the largest burdens for those of us tasked with assessing the risk of hack attack or computerized intrusion is identifying the clients and hosts that are currently connected to our network. “Knowing ourselves”.

Identifying systems is an especially difficult task in large corporate, educational or public networks. These networks usually have distributed asset management and technical support functions. As wired network access had become commonplace and wireless network access grows in popularity, it becomes more and more difficult to keep an up to date listing of the systems that comprise your network. Keeping tabs on legitimate connections to the network becomes increasingly difficult in large networks with decentralized inventory and asset management and varying levels of support. Manual asset and inventory systems usually have little detail about network connectivity or software. Even in organizations that have formal centralized inventories, both operating systems and network connectivity details are either not

part of the data available or simply not populated. In some cases even when databases of systems detail do exist they are not available to the risk assessors or intrusion detection staff.

One of the highest risks is a rogue machine on any network. These are the machines that are usually unknown to management and data security personnel and are outside the usual **Zones of risk** (1). These machines are many times outside the standard maintenance and support methods even though they have been setup by those very same support individuals. Because they are setup and forgotten about, these are the machines that are in many cases running out-of-date or vulnerable software. Many times running services like FTP, Mail, or ICQ that do not belong there. Worse yet running some remote control package like PCAnywhere, VNC, BackOrface or Sub7 and is being used as a back door gateway into your network. With this in mind an independent method of taking an inventory of the devices currently attached to your network must be developed.

**If ignorant both of your enemy and yourself, you are certain to be in peril. (Sun Tzu ancient art of war) (1)**

You must know what you are defending to adequately defend it. Many of these rogue machines are installed by the most technically savvy users and IT support personnel you have in your organization. Usually these systems are created as a workaround to policies and procedures that are not fully understood or enforced. What follows is a description of our journey over the past several months using existing software utilities to identify the hardware and software that places our network at risk. I am hopeful that the tools and ideas used here will help others construct a suite of tools that suits their needs and will save them some of the headaches and redesign time we have spent. We did not have a clear vision of the end product when we started, by publishing our journey I hope to save others some of that pain.


**Using existing tools to build a better mousetrap**

What we initially set out to do is produce a system using commonly available tools that will identify the systems on our network, document some of the security risks, and identify who has responsibility for those systems. The elements of importance for us were:

- |  |                  |
|--|------------------|
| IP address   | <i>Figure 0.</i> |
| MAC address  |                  |
| DNS name   |                  |
| NetBIOS machine name   |                  |
| Network user ID  |                  |
| Operating system   |                  |
| Applications (services running)                              |                  |
| User name  |                  |
| User department  |                  |
| User location  |                  |
| User phone   |                  |
| Support representative (entered as a function of department) |                  |
| Security contact (entered as a function of department)       |                  |

## Vulnerability details

We have tried to use a model that is OS independent and can be hosted on either Linux or Windows NT systems. (Other Unix flavors probably also work well but we chose Redhat because it was what we were familiar with.) The basic flow of the original system is illustrated in figure.1.

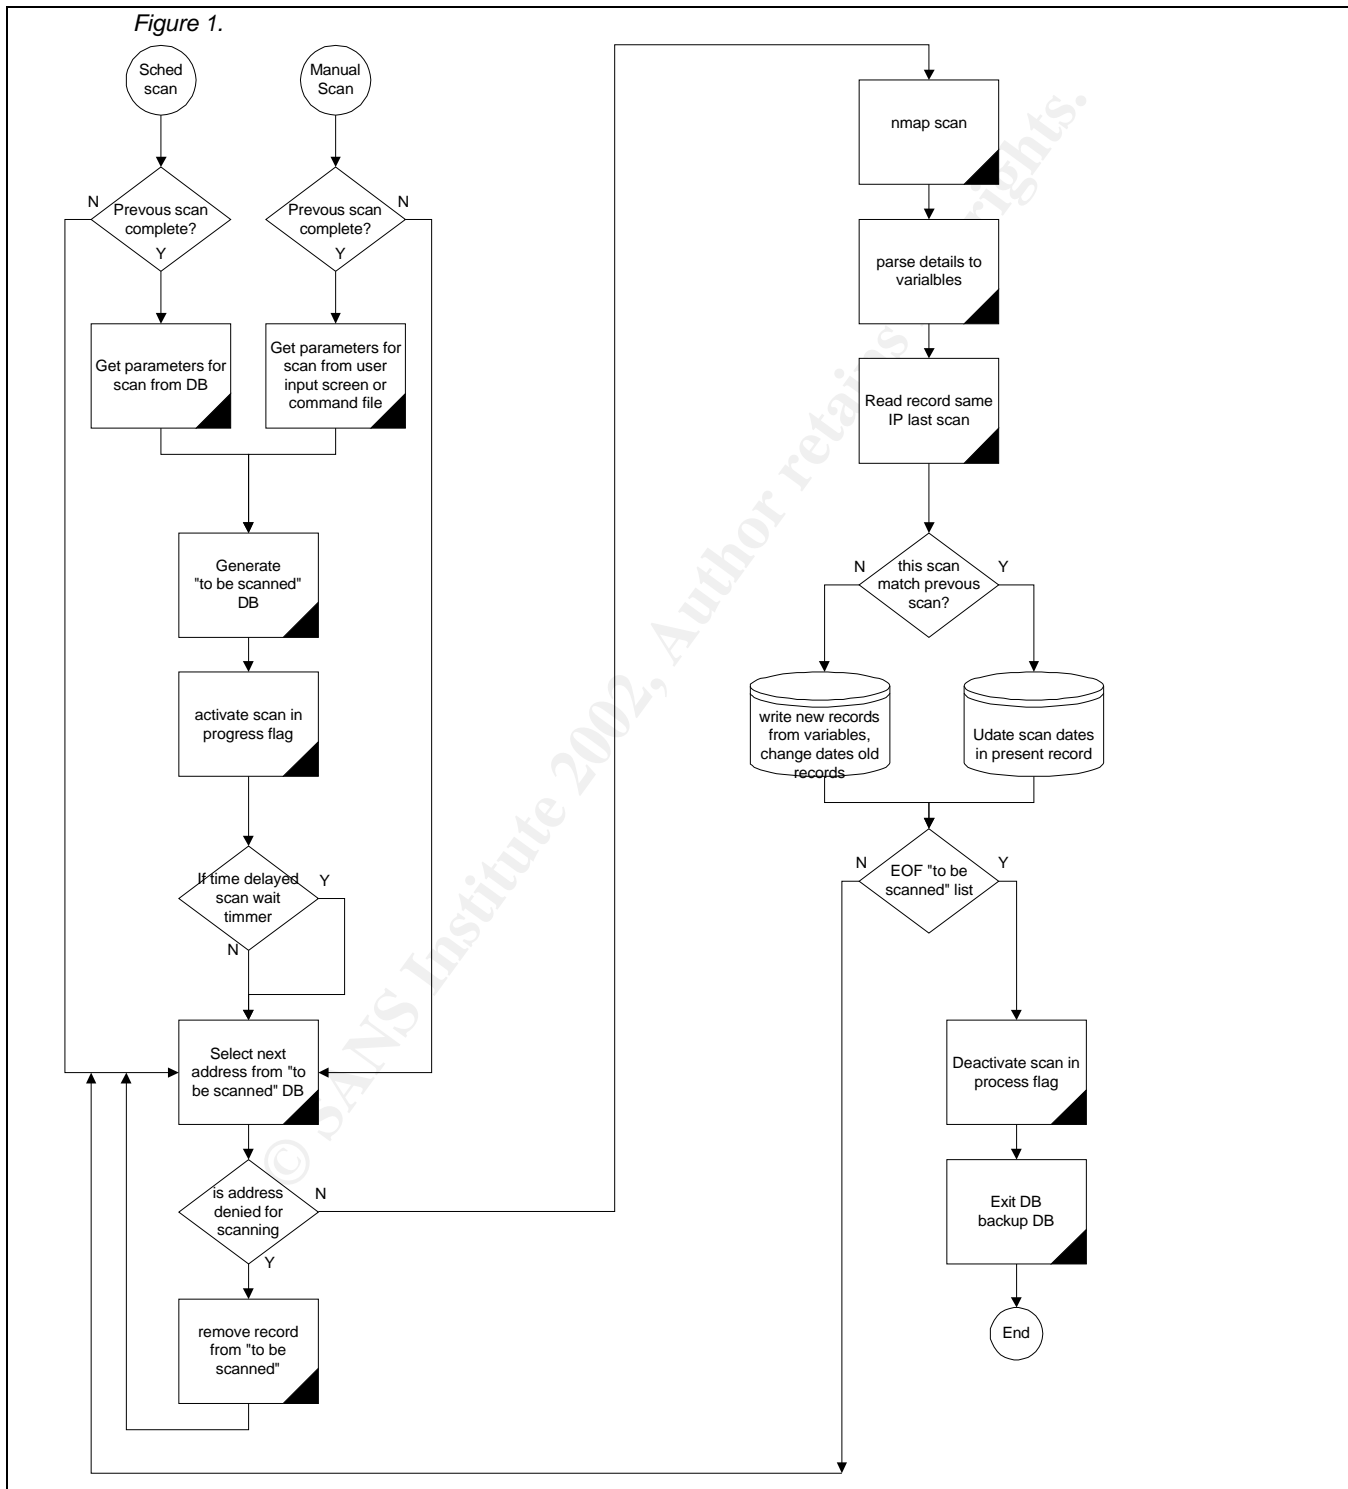

The entire system can be constructed on a single machine, but I would recommend having the SQL database on one machine, and the scanning software on another. The primary reason for this is speed. Both the database and scanning engine are processor and IO intensive processes and seem to work faster on multiple smaller x86 machines rather than a single large (fast) one. In theory many machines could be setup as scanning engines each assigned to a small physical or logical portion of the network, funneling data back to a central database. This would decrease scan times significantly and also allow some freedom within segmented or firewalled networks to scan addresses not reachable from a single point. This also allows the database and scanning engine to use different operating systems, in our case we had a production grade MS SQL server available to us and could then run the scanning engine Nmap (3), Samba and Nessus (10) on Linux. I believe the scanning tools run faster and give slightly better results when run under Linux because of the flexibility in the underlying IP services. The opposite can be run. MySQLx86™ for the database on Linux and the scanning can be Windows based using NmapNT (6) and Nessus (10) for Win32. These scanning tools are not as mature for the windows platform and these scanners are usually limited by the Microsoft IP stack. Activestate™ Perl can be used on both platforms and has worked well for us. Add-ins for MS-SQL, MySQL™ and LDAP database connectivity are also available from the Activestate™ website or can be linked to from there.

### Our original scans with Nmap

I am indebted to H D Moore for his work on Nlog (5) and his scripts for putting Nmap(3) output into database format, they were the beginning of this thought process for me. A listing of our early database structure is provided in figure 2. Using an Nlog like structure for storage, we began doing repetitive Nmap scans of our Class B network and writing the output to a database for comparison against future scans. A list of tables is available at the end of this document.

*FIGURE 2.*

Master_DB_IP	Sub_DB_Port	Note
IP	Port	One exclusive master record for each IP.
IP1 octet 1	Port	Many port records, one for each port found for each IP address. (one to many)
IP2 octet 2	Port status	
IP3 octet 3	Port type	This has evolved into db table 6 IP Master
IP4 octet 4	start date	
DNS	last update	
OS detected	end date	
Start date		
Last update		
End date		

We soon found that Nmap scanning causes problems with several older versions of AIX, it also makes older HP Jet Direct cards loose communication with the network and causes older versions of PCAnywhere loose control of its IP based service. Many other similar anomalies have since been reported on the Nmap list (4). All of these faults required a reset of the host service. This was something our department network and server administrators were not very

happy about, especially since we were scanning seven days a week, round the clock. This brought about the next link in the chain, a database of addresses to be excluded from scanning. This does have some risk, because if a system is compromised in that group of exclusions we may not see the change in services. This risk was deemed to be less than the pain our administrators were experiencing from our scans breaking things. Keep in mind that any of the machines that were open to the outside Internet were subject to being scanned by others with similar consequence. Supplemental scans of the restricted addresses were scheduled with each administrator. The structure for the addresses to be excluded is illustrated in Figure 3. including start, stop, and update fields so we could add and remove systems for limited times based upon system administrator requests.

Figure 3.

Restricted\_addresses\_db

IP	Originally we thought we could selectively scan some ports and not others for each IP. This has proven to be a problem to pass the list to Nmap for each address. Now we just drop the entire IP from the list. (Evolved into table 5 Exclusion list)
Port	
Start date	
Last update	
End date	

We then continued scanning, skipping the addresses in the restricted list, and producing reports of the types of services found within our network. Several of the most telling reports were listings of:

- Listings of windows machines vulnerable to NetBIOS compromise (port 139 open) (7)
- Number of HTTP servers (port 80),
- Number FTP servers (port 21),
- Anonymous FTP servers
- Servers with more than 20/50/100 ports open,
- Machines infected with known trojans etc.
- And others

These reports were very helpful in our overall understanding of the vulnerability of our network (9) because many of the recipients of these reports were unaware of the services running in their area. This was compounded by many servers having default services running. A good example of this is HP Jet Direct print servers that have HTTP, FTP, SNMP open on them by default.

As we began working down through the lists of machines with problems, we quickly addressed issues on our primary servers. In addition we found that for many of the departmental servers there was no good way to get this reporting to the administrator of the server that was vulnerable. Worse yet, there was no good way to isolate the owner of a particular IP address, or where it was located other than knowing the location of the up-line hub or switch it was connected to. In our case the network infrastructure was well documented, and we had good location information for all of these up line devices. Our location problems were compounded because some of the machines exhibiting the highest number of open ports were not servers at all but individual user

workstations. DHCP complicates this even more because DHCP addressing pulls addresses from an open pool of available addresses so that the link of class C network number to the geographical department originally planned in our environment was lost.

## **Evolution of the tools**

What we needed was a better tool; one that could scan the network like Nmap but that could also identify users and details about the physical location of the machine being scanned. Figure 4. illustrates the mix of tools we chose to help collect a better set of vulnerability data about each host.


Scans can be scheduled or can be triggered manually as needed. For manual scans the command variables are chosen and stored these include IP range to scan, ranges or individual IP's to exclude, and which scanning tools to run. For scheduled scans databases containing the range of addresses to be scanned, and the addresses to be exempt from scanning are used. Databases are also available containing addresses and ports attributed to known vulnerabilities, trojan and viri for use in reporting. Lists of the database tables are available at the end of this document.

Once the controlling criteria are set, a list of IP addresses to be scanned is generated and saved to a "to be scanned database" and a flag is set to allow restart in case of program failure. This has become a necessity because several environmental issues can cause Nmap, Nessus or other scanners to lockup and error in ways that cannot be recovered from programmatically. On Linux derivatives of our system a process monitoring script can automatically increment the address to be scanned database and run another copy of the scanning software upon failure.

Once the initial criteria for the scan are setup the program checks the address about to be scanned against a list of "denied" addresses. Our environment contains medical devices that can connect via IP, like heart monitors, drug dose dispensing, and lab equipment. These devices are segregated into physically or logically separate networks. Some of our sample scanning points were selected to test the ability to reach these devices. These devices are scanned for vulnerability under test conditions rather than interfere with them in any way during their clinical usage. These ranges are denied from normal scanning and outside connection.

An Nmap scan is run and the elements in Figure 0. are collected to variables. There is a one to many relationship of the IP address master record to the Port records. Much like the text output of Nmap a Port record is created for each detected port and the status of open or closed is also recorded. These IP master and Port detail records are marked with activity dates do changes of the open ports can be reported on over time. Also reports of the increase or reduction of open services can be created for quarterly or yearly risk analysis. If no change is detected when evaluated against previous scans, only the checked dates are updated in the database.

Figure 4.

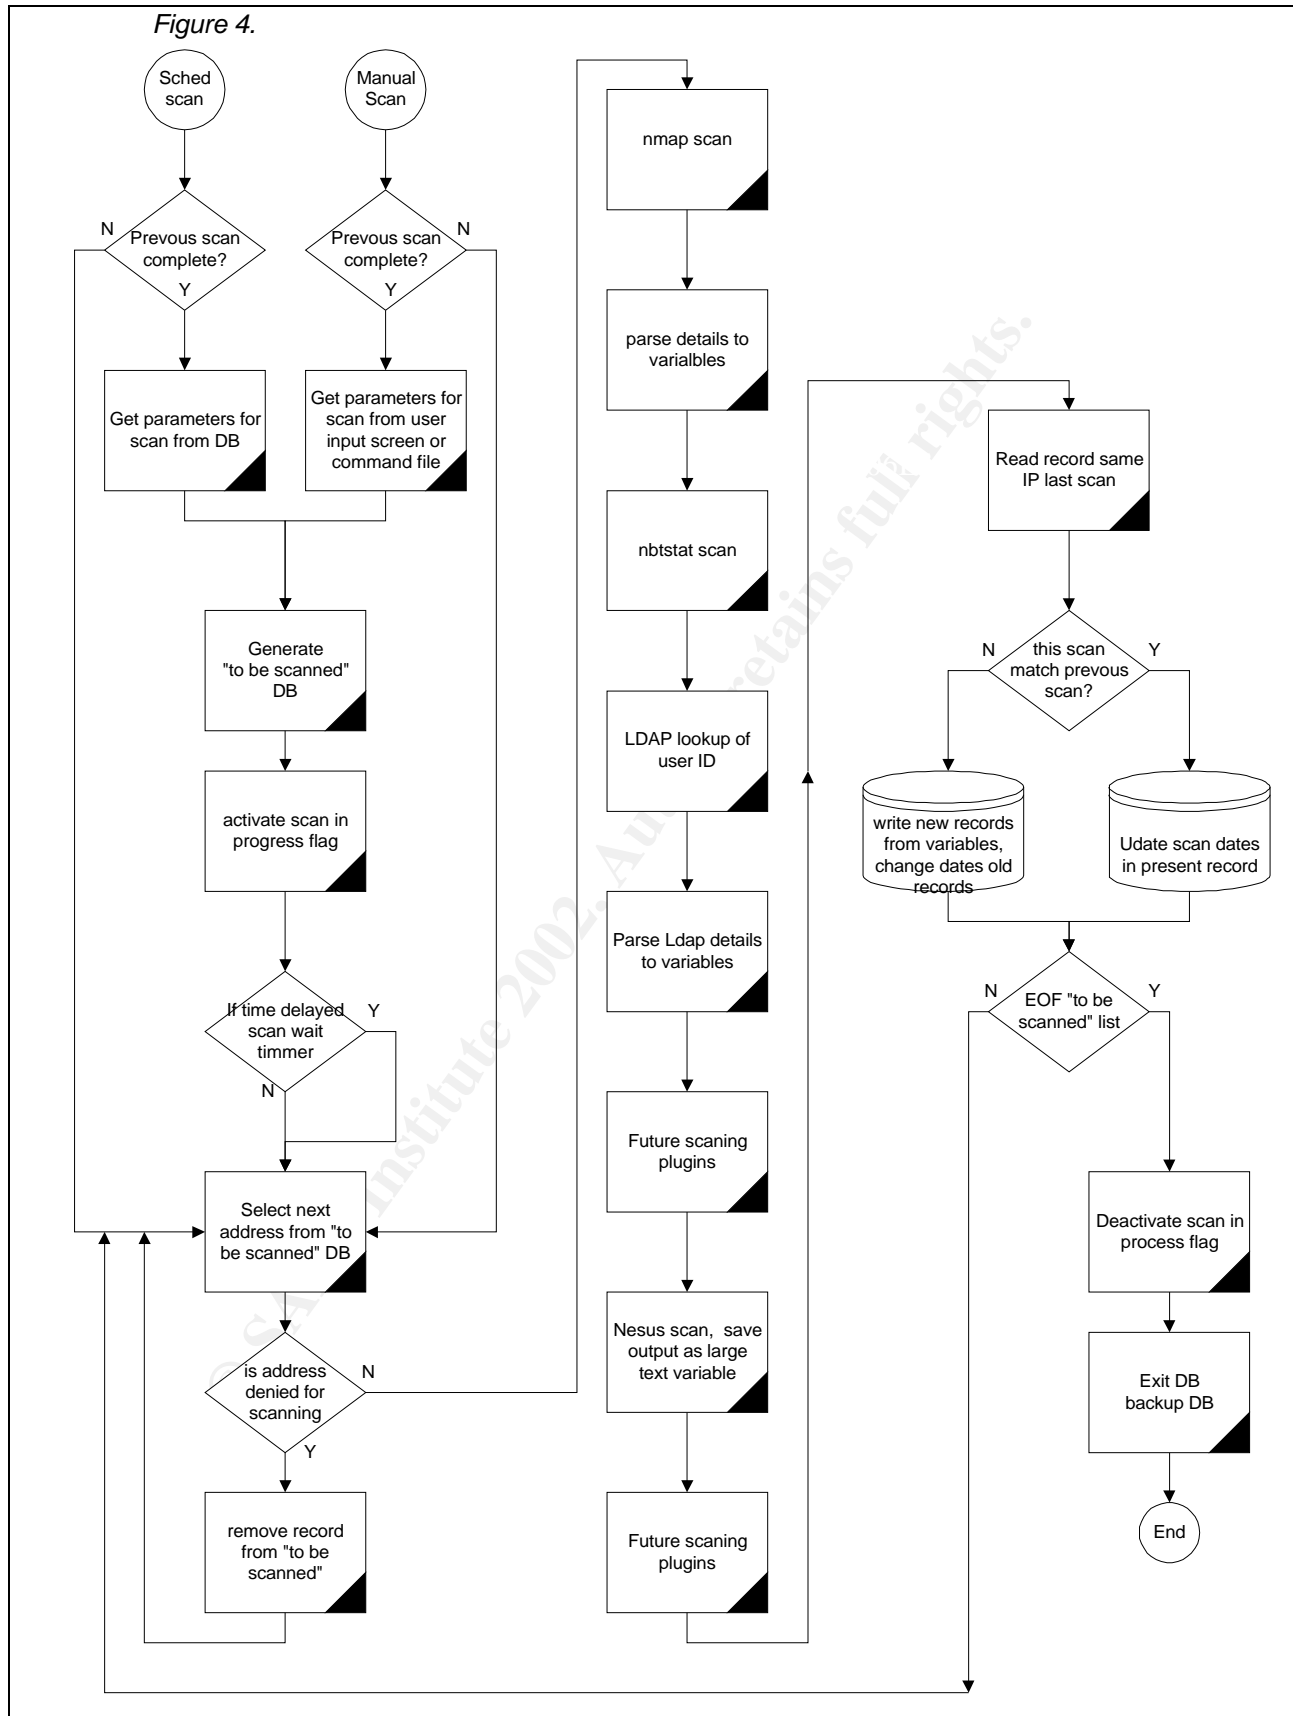



The next scan to take place is actually issuing the MS DOS / Samba command NBTstat which collects NetBIOS and Microsoft domain details about the IP the command is issued against. (8) This populates the MAC address, MS\_domain and MS\_shares rows of the IP detail database for the selected IP address. The MS\_user row of the User detail database is also populated from the output of this command. A sample NBTstat output is displayed in figure 6.

Figure 6. NetBIOS Remote Machine Name Table

Name	Type	Status
-----		
MAC Address = 00-60-08-A4-DF-4B		
MY-MACHINE-NT1	<00>	UNIQUE
MYDOMAIN	<00>	GROUP
MY-MACHINE-NT1	<20>	UNIQUE
MYDOMAIN	<1E>	GROUP
MYDOMAIN	<1D>	UNIQUE
HARRISMC	<03>	UNIQUE
.._MSBROWSE_.	<01>	GROUP

An explanation of the coding used for the output of this command is available at <http://support.microsoft.com/support/kb/articles/Q163/4/09.asp> and a description of enumeration based upon command line usage of NBTstat is available in Hacking Exposed 2<sup>nd</sup> edition page 77 and 78 (8). Keep in mind that only Windows and Samba clients (other NetBIOS aware systems) will respond to this command. We have had about an 80% positive hit rate within our network.

The next step is only available to Exchange users who populate their LDAP service with the Microsoft domain login names. This is, I believe, a default setting and easily publishable within Exchange, but many organizations that publicly publish their LDAP services do not want to include the logon ID for obvious security reasons. We take the MS logon name found from the NBTstat and look it up in our exchange LDAP service this gives us the data required to populate the matching rows in the User detail table as described in figure 7.

Figure 7.

User Detail (linked to IP master via IP)

IP

MS_user	This is a duplication of data for what is redially available from LDAP. We keep previous entries based upon scan dates because no historical data is kept by LDAP and department changes as users move from one department were lost. Many vulnerabilities and bad behaviors follow users as they move. This has evolved into table 9 as listed at the end of this document.
User_Name	
User_department	
User_address	
User_phone	
Start_date	
Checked_date	
End_date	

With this process complete we have a database source of the active IP addresses in our network, the services running on those machines and the operators of those machines with physical department locations and phone numbers if needed to contact them. The remaining 20% of the devices with IP addresses are network gear (switches, hubs, routers etc.) supported by an institution wide network support group or dedicated lab equipment. Nmap is able to detect many of both of these types of devices through its OS detection feature leaving only a small number of addresses to be manually investigated.

The next stage of scanning is more a matter of vulnerability assessment than machine or user identification. A Nessus scan is run against the target IP address and the output is placed as a single large text entry in the IP detail database in the Vulnerabilities\_checked row. Each text block is parsed for the text strings in the Danger table to determine if any of the restricted or dangerous items are found. These items are specifically called out in policy and procedure and are reported upon on a quarterly basis. When found certain suggested and mandatory actions must be taken. These individually reported vulnerabilities are: Password less MS shares, anonymous FTP, unencrypted Telnet, mail forwarding, and SNMP public strings. A database of dangerous ports has also been created to check when reporting. Structure of that database is listed in table 4 at the end of the document.

Once the Nessus scan is complete data stored in variables throughout the scanning process is compared with previous detail records. If new details were found a new record is created and the begin and end dates are set. If no changes are found the existing records are retained and the Checked date for each is updated. Figure 7 is a complete list of the table structure for the application.

Other scans for your network can be added within this structure. One of the scans we have added due to the Code Red Worm outbreaks is daily targeted scans of smaller ranges. This is mostly because this type of scanning is slow, it takes several days to scan a complete a scan of a class B network. This limited our response time for new vulnerabilities as they were found. We have added the ability to prefeed lists of addresses to the “to be scanned” list based upon what services were found active in previous scans. As an example specific scans of only machines that have port 80 (HTTP) open are scanned for CGI and web server vulnerabilities.

### **Items we have slated for future development**

Next we will be developing a dedicated web based front end for initiating the scanning process and a web based report selection tool. At present both of these processes are done manually by our security staff. One future developments planned is a link to our intrusion detection databases. Snort creates a very good database of the traffic target to or from a specific IP address. Having a link to this data when reporting vulnerability would be of great value during assessment, to be able to make a determination that a vulnerability was already being exploited is our goal.

## Unresolved Problems

One of the problems we have not resolved is multiple reportings of the same vulnerability on multi-homed machines. (1) We are working to eliminate these duplicates by using a batch cleanup process that searches for duplicate MAC addresses.

Another problem is that of non-Microsoft NetBIOS aware devices. There are many devices that do not respond to NetBIOS calls. Much of the network gear and alternate operating systems do not respond to NBTstat therefore we do not receive user data or location details about them. We are currently adding location details manually to the database about non-NetBIOS responsive devices.

## Summary

With the number of intrusive or malicious events on our networks growing at a frightening rate and external attack from the Internet on the rise, we have to begin thinking like the intruders that are looking toward our systems to exploit their resources. We must be equally diligent about modem pools and any side channels that can be used to infiltrate our networks. This drives the need for good information about the systems that we have within our networks and the vulnerabilities exist within them. Simple inventories on paper or in databases are not enough. The users and devices on your network are dynamic and constantly changing. With the constant threat there must be a constant vigilance on our part to keep our networks secure.

© SANS Institute 2002, Author retains full rights.

## References

Special thanks to James Cutts III, Project Manager, ITS RES, University of Missouri Health Center for his assistance in database planning and authoring of the Perl scripts that is the glue of this project.

- 1) “Zone of risk” concept originally from *Thinking About Firewalls* Marcus J. Ranum originally presented at SANSII in Washington, DC, 1993  
[http://www.linuxsecurity.org/resource\\_files/firewalls/ThinkingFirewalls/ThinkingFirewalls.html](http://www.linuxsecurity.org/resource_files/firewalls/ThinkingFirewalls/ThinkingFirewalls.html)
- 2) For the quote and graphic on the starting page,  
<http://www.mailsbroadcast.com/the.artofwar.3.htm>  
Copyright May 2001 MailsBroadcast dotcom - All rights reserved.  
Reprinted with permission from <http://www.mailsbroadcast.com>
- 3) Nmap <http://www.insecure.org/nmap/> My greatest appreciation for Fyodor and the team developing Nmap without Nmap this project would not have been possible.  
Initial product reference. Man pages referenced.
- 4) *Nmap* Moderated list for announcements, patches, and light discussion regarding the Nmap scanner <http://lists.insecure.org>
- 5) Nlog by H D Moore <http://www.digitaloffense.net/nlog/nlog-1.6.0/BUGTRAQ> referenced as the original idea and basis for this project.
- 6) Special thanks to the folks at eEye for recompiling Nmap for Win32, allowing our detectors to be both Windows and Linux based  
<http://www.eeye.com/html/Research/Tools/nmapNT.html>
- 7) *Hacking exposed 2<sup>nd</sup> ed.* Scambray McClure & Kurtz Osborne, McGraw Hill 2001  
<http://www.hackingexposed.com> , page 50 & 51 re: understanding risk from Nmap scanning
- 8) *Hacking exposed 2<sup>nd</sup> ed.* Scambray McClure & Kurtz Osborne, McGraw Hill 2001  
<http://www.hackingexposed.com> , Page 77 & 78 re: NetBios enumeration.
- 9) *Hacking exposed 2<sup>nd</sup> ed.* Scambray McClure & Kurtz Osborne, McGraw Hill 2001  
<http://www.hackingexposed.com> , Page 44 re: Port Scanning to determine OS and applications.
- 10) *Nessus* remote security scanner <http://www.nessus.org/intro.html>
- 11) *Sun Tzu: The Art of Warfare*, translated by Roger Ames, Ballantine Books, New York, 1993 <http://vikingphoenix.com/public/SunTzu/suntzu.htm>

## Data Base Tables

### DB table 1 Command

Range\_Start  
Range\_end  
Start\_date  
Start\_time  
Stop\_date  
Stop\_time  
Completed  
Restart\_halted\_scan  
OM *logfile*name  
Port\_list  
Port\_type  
Source\_IP\_address  
Host\_timeout  
Ldap\_lookup  
Nmap\_string\_used  
Nessus  
Nessus\_string\_used

### DB table 2 IP to Scan

IP  
Status

### DB table 3 Ports to Scan

Ports\_to\_scan  
Port\_type

### DB table 4 Danger

IP  
Port  
Port\_desc  
Status  
Status\_desc  
Sugested\_action  
Mandatory\_action

### DB table 5 Exclusion List

IP  
Start\_date  
End\_date  
Reason\_excluded  
Ports\_allowed  
Ports\_excluded  
Auth\_by  
Notes

Nmap  
Nbtstat  
Nessus  
Owner  
Owner\_group

DB table 6 IP Master

IP  
IPa  
IPb  
IPc  
IPd  
Port\_data  
Start\_date  
Checked\_date  
End\_date  
Owner  
Owner\_group

DB table 7 IP Detail

IP  
IPa  
IPb  
IPc  
IPd  
OS  
Domain\_name  
MS\_domain  
MAC  
Vulnerabilities\_detected  
MS\_shares  
MS\_passless\_shares  
FTP  
Telnet  
Sntp\_fwd  
Snmp\_pub  
Ports\_open\_count  
Owner  
Owner\_group

DB table 8 Port Detail

IP  
Port  
Port\_type  
Port\_stat  
Port\_desc

Danger  
Start\_date  
Checked\_date  
End\_date  
Owner  
Owner\_group

DB table 9 User Detail  
IP  
MS\_user  
User\_name  
User\_department  
User\_Address  
User\_phone  
Start\_date  
End\_date  
Owner  
Owner\_group

DB table 10 Owners  
Owner  
Owner\_group  
Start\_date  
End\_date

### Questions

- 1.
  - 2.
  - 3.
  - 4.
  - 5.
- True / False
- 6.
  - 7.
  - 8.
  - 9.
  - 10



# Upcoming SANS Training

[Click Here for a full list of all Upcoming SANS Events by Location](#)

SANS San Francisco Winter 2017	San Francisco, CAUS	Nov 27, 2017 - Dec 02, 2017	Live Event
SIEM & Tactical Analytics Summit & Training	Scottsdale, AZUS	Nov 28, 2017 - Dec 05, 2017	Live Event
SANS Khobar 2017	Khobar, SA	Dec 02, 2017 - Dec 07, 2017	Live Event
SANS Munich December 2017	Munich, DE	Dec 04, 2017 - Dec 09, 2017	Live Event
European Security Awareness Summit & Training 2017	London, GB	Dec 04, 2017 - Dec 07, 2017	Live Event
SANS Austin Winter 2017	Austin, TXUS	Dec 04, 2017 - Dec 09, 2017	Live Event
SANS Frankfurt 2017	Frankfurt, DE	Dec 11, 2017 - Dec 16, 2017	Live Event
SANS Bangalore 2017	Bangalore, IN	Dec 11, 2017 - Dec 16, 2017	Live Event
SANS Cyber Defense Initiative 2017	Washington, DCUS	Dec 12, 2017 - Dec 19, 2017	Live Event
SANS Security East 2018	New Orleans, LAUS	Jan 08, 2018 - Jan 13, 2018	Live Event
SANS SEC460: Enterprise Threat Beta	San Diego, CAUS	Jan 08, 2018 - Jan 13, 2018	Live Event
SEC599: Defeat Advanced Adversaries	San Francisco, CAUS	Jan 15, 2018 - Jan 20, 2018	Live Event
SANS Amsterdam January 2018	Amsterdam, NL	Jan 15, 2018 - Jan 20, 2018	Live Event
Northern VA Winter - Reston 2018	Reston, VAUS	Jan 15, 2018 - Jan 20, 2018	Live Event
SANS Dubai 2018	Dubai, AE	Jan 27, 2018 - Feb 01, 2018	Live Event
SANS Las Vegas 2018	Las Vegas, NVUS	Jan 28, 2018 - Feb 02, 2018	Live Event
Cyber Threat Intelligence Summit & Training 2018	Bethesda, MDUS	Jan 29, 2018 - Feb 05, 2018	Live Event
SANS Miami 2018	Miami, FLUS	Jan 29, 2018 - Feb 03, 2018	Live Event
SANS London February 2018	London, GB	Feb 05, 2018 - Feb 10, 2018	Live Event
SANS Scottsdale 2018	Scottsdale, AZUS	Feb 05, 2018 - Feb 10, 2018	Live Event
SANS Secure India 2018	Bangalore, IN	Feb 12, 2018 - Feb 17, 2018	Live Event
SANS Southern California- Anaheim 2018	Anaheim, CAUS	Feb 12, 2018 - Feb 17, 2018	Live Event
SANS Dallas 2018	Dallas, TXUS	Feb 19, 2018 - Feb 24, 2018	Live Event
SANS Secure Japan 2018	Tokyo, JP	Feb 19, 2018 - Mar 03, 2018	Live Event
Cloud Security Summit & Training 2018	San Diego, CAUS	Feb 19, 2018 - Feb 26, 2018	Live Event
SANS Brussels February 2018	Brussels, BE	Feb 19, 2018 - Feb 24, 2018	Live Event
SANS London November 2017	OnlineGB	Nov 27, 2017 - Dec 02, 2017	Live Event
SANS OnDemand	Books & MP3s OnlyUS	Anytime	Self Paced