



Interested in learning
more about security?

SANS Institute InfoSec Reading Room

This paper is from the SANS Institute Reading Room site. Reposting is not permitted without express written permission.

Host Assessment and Risk Rating

Corporate websites get defaced; business activities of organizations get crippled; identity stolen; confidential information made public - all because of not securing information and resources, and not taking precautions necessary to protect against attacks. These attacks, apart from causing millions of dollars loss in revenue, also result in customer inconvenience, loss of customer confidence, loss of intellectual property and market advantage, liability for compromised customer data, and the time and money spent reco...

Copyright SANS Institute
Author Retains Full Rights

AD

DEEPARMOR®

Host Assessment and Risk Rating
Radhika Vedaraman
Version 1.4b, Option 1
5/31/04

Abstract2

Purpose2

Scope3

Procedure3

Development of the MSB4

Risk Rating7

Host Assessment9

Risk Assessment Tool9

Addressing Risk12

Conclusion12

Reference13

© SANS Institute 2004, Author retains full rights.

ABSTRACT

“The world isn’t run by weapons anymore, or energy, or money. It’s run by little ones and zeros, little bits of data...”

- Dialogue from the movie *Sneakers*, MCA/Universal Pictures, 1992

Corporate websites get defaced; business activities of organizations get crippled; identity stolen; confidential information made public - all because of not securing information and resources, and not taking precautions necessary to protect against attacks. These attacks, apart from causing millions of dollars loss in revenue, also result in customer inconvenience, loss of customer confidence, loss of intellectual property and market advantage, liability for compromised customer data, and the time and money spent recovering from the attack.

According to surveys conducted recently,

- Hacker were able to steal up to 8M credit cards¹
- Quantity of cyber security incidents reported has roughly doubled every year since 2000 – jumping from nearly 22,000 incidents for all of 2000 to 76,000 in the first half of 2003 alone²
- Viruses such as Blaster, Welchia, and Sobig.F have resulted in as much as \$2 billion in damages.³
- Theft of proprietary information has caused a loss of \$70,195,900, with the average reported loss being approximately \$2.7 million. Denial of service has a caused a loss of \$65,643,300.⁴

In the past few years, more businesses have gone online. Because of the growing list of vulnerabilities, and increased regulatory pressure, security has become a pressing business issue at the highest levels of most organizations. For example, any enterprise that deals with Visa Credit Card information must be in compliance with the VISA CISP, and any company that deals with health information must be in compliance with the HIPAA. According to a survey conducted by Ernst & Young⁵, 38% of the survey responders cited these regulatory rules as having a major impact on their organization’s security policy and structure.

A company’s security infrastructure must be tightened so as to prevent unauthorized access, theft, and inappropriate usage. Inherent to each environment is a risk – a chance that the above-mentioned can happen. So there is a need for some mitigating or preventing controls. These controls can potentially reduce the probability of occurrence of such an attack. Industry’s leading practices, which are a consensus of approaches, architectures, and solutions that protect network, systems, and data, must be employed while designing such controls.

This paper strives to develop a model that could be used to design a Minimum Security Baseline (MSB) for an enterprise. It also suggests a method to assess the existing infrastructure against the established MSB in order to find the gaps. Then it goes on to illustrate a procedure to resolve these gaps.

PURPOSE

1 <http://money.cnn.com/2003/02/18/technology/creditcards/>

2 Carnegie Mellon University’s CERT Coordination Center

3 www.computereconomics.com/article.cfm?id=867.

4 CSI/FBI COMPUTER CRIME AND SECURITY SURVEY 2003

5 Global Information Security Survey 2003 by Ernst & Young

Host assessment and Risk rating helps in identifying threats, vulnerabilities, and risks to the infrastructure, and then in quantifying the impact of the potential vulnerabilities. The return of investment must be calculated to evaluate if the cost of mitigating a risk outweighs the cost incurred if the vulnerability is exploited so that management can decide which risks to prevent, limit, or accept.

An enterprise typically has a large number of servers and network devices. It becomes difficult to find the current state of each network component so as to fix the gaps. Even if we consider only a sample set of these components, it is easier if there is a tool to help summarize the results and present them along side so it is easier to compare them. An excel spreadsheet has been developed that helps to automate this process. The process is described in the following section, while the working of the tool is described later.

SCOPE

At present, this paper deals with assessing various platforms (E.g.: Windows, Solaris, Linux, and Mainframe). This could be very easily modified to accommodate network devices and others standards as required. This paper will take Windows 2000 as an example, and present a sample for the various steps. Few snapshots of the excel spreadsheet tool will be presented in this paper, while the actual tool is located at <https://filebox.vt.edu/users/rvedaram/GSEC/>

PROCEDURE

The sequence of steps involved in this process is as follows:

1. Identify the platforms
2. Develop Minimum Security Baseline (MSB) for those platforms
3. Identify a set of representative systems for each of those platforms.
4. Assess the representative systems against the MSB for each platform.
5. Identify Gaps
6. Develop the Risk Rating for each of the system.
7. Develop a Plan of Action based on the Risk Ratings.
8. Obtain approval for the mitigating measure from the necessary governance body.
9. Implement Plan of Action.

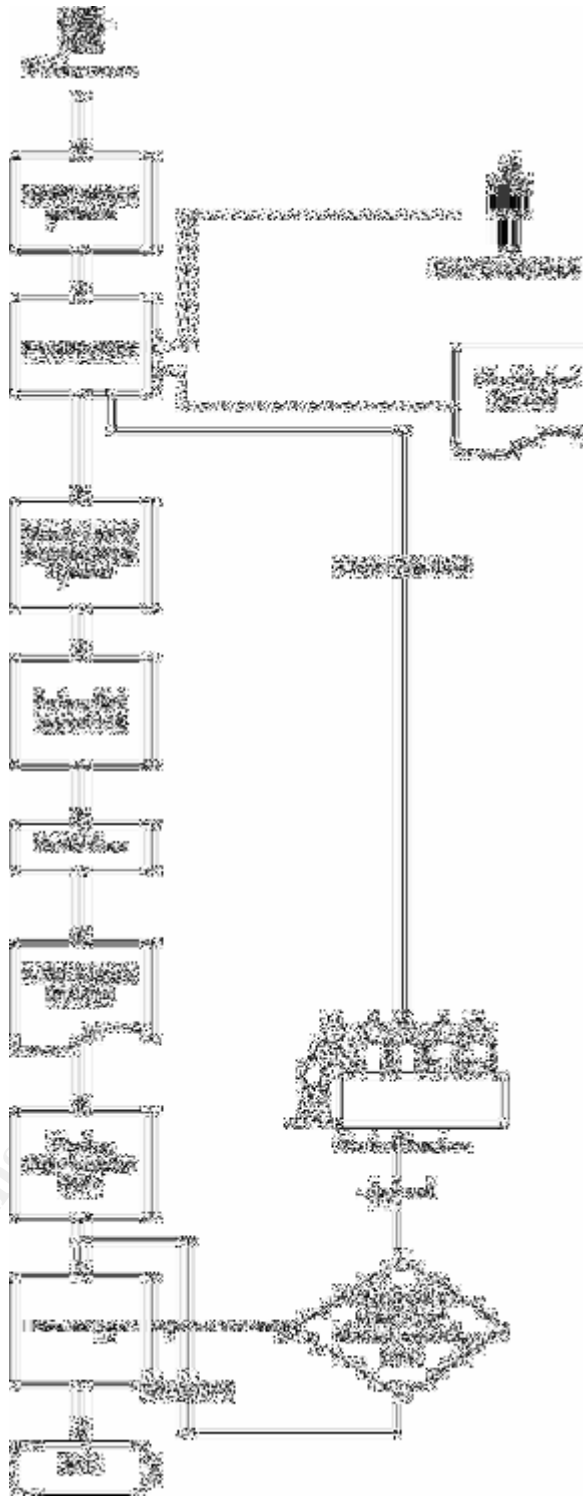


Figure 1: Flowchart of Host Assessment

DEVELOPMENT OF THE MSB

An enterprise must have a secure IT infrastructure, which must be in compliance with various regulatory rules and policies. Many of these Regulatory

Rules require that an enterprise wide Information Security Policy is developed and maintained. A set of standard configurations for various platforms and devices are also required. In order to develop these, the various working groups in the enterprise must reach consensus. Baselines are derived from associated security policies and procedures, and risk avoidance decisions made by the organization based upon its documented rationale for reasonable security protections and measures. These documents are then published and become the standards that need to be implemented throughout the organization.

Developing a Minimum Security Baseline for Windows 2000 ensures that a uniform set of standards is applied on all Windows 2000 Systems (Servers and Workstations) across the enterprise. All Windows 2000 systems must be in compliance with this standard. If there is a valid business reason that prevents the implementation of a control in the standard, then an exception or a waiver as required must be submitted. This document must be reviewed periodically and maintained as new changes occur in the environment.

COMPONENTS OF A MSB

Control Title: This is a short statement that identifies the crux of the control statement.

Control Statement: This statement describes what the control hopes to achieve in technical terms. It is intended for a technical person.

Business Risk: This section describes the risk of not implementing a control, and how it would affect the business. This is intended for the management.

Implementation Procedure: This is a detailed account of how to implement the control for the given environment.

Assessment Procedure: This is an account of how to verify if this control is satisfied. It could be done using an automated tool, or by manually verifying some settings. This procedure could be used for assessing the Host.

DEVELOPMENT OF CONTROLS

A MSB is composed of a set of controls that describe the security features necessary. Controls must be developed using Industry Best Practices, and prior experience. For example, in order to develop a MSB for Windows 2000, refer to the recommendation by Microsoft, Security configuration guide from NSA etc.

Types of controls

An MSB should typically cover the following sections.

General: These are controls that cannot be classified into the following sections.

Eg. Keep security patches up-to-date.

Network Related: Controls that describe how a system/device must be connected to a network, and configured. These are specific to the network architecture and how the components communicate within that framework.

Eg. Require SMB Signing

Account Management: Controls that deal with how user accounts must be created, modified, deleted and other controls needed to safeguard the userID, and User sessions

Eg. Do not display last login name, set account lockout policy as per the corporate policy.

Authentication: Controls that deal with passwords and how authentication takes place.

Eg. User Password must be set according to the corporate policy, use at least NTLMV2 for authentication.

Authorization: These are control that deals with permissions: who can access which file and how, what kinds rights they possess etc.

Eg. Limit the users who can debug programs

Confidentiality: This section deals with data classification, and how sensitive information is protected.

Eg. Encrypt sensitive user data using EFS, or other encryption mechanism

Logging & Monitoring: This section deals with what to log, how long to retain them, and how sensitive activities and files are monitored.

Eg. Audit successful access to files and folders

Policies and Procedures: Policies are needed, as many regulatory rules require them. Also without documented policies it will be difficult to prosecute intruders and other malicious users. This section describes the various policies, guidelines and procedures required.

Eg. Implement and maintain information Security Policy

Things to consider while designing controls

1. All the controls must be discrete. They must evaluate to a boolean value. A control statement such as "*All critical events must be logged and they must be monitored periodically*" would be unacceptable as it cannot be evaluated to True or a False (Compliance/Non Compliance), as events could be logged, but not monitored. Alternatively, consider splitting this into two separate discrete controls.
2. All the controls must be measurable. A statement such as "*A good, complex password must be used*" is inappropriate. Goodness is a relative concept and this control by itself could not be evaluated or measured. It should be modified to something like "*The password must be set according to the corporate security policy*".

This achieves two goals

1. If there is a change in the corporate policy, it is enough if it is changed at one place, as other standards just refer to this policy

2. There is a consistent value across all platforms in the enterprise, and it now becomes measurable.

However, it is necessary to recognize that some of the controls are not applicable to every information system or environment, and might not be practical for all organizations. There must be an applicability column in the MSB, which specifies the environment that a control can be applied to.

In Windows 2000, the different environments could be classified as

- 1) DC- Domain Controller
- 2) Application Server
- 3) File and Print Server
- 4) Workstation
- 5) Exchange Server

A control such as, “*Use Active Directory Integrated Zone for DNS*” is applicable only to the Domain Controller, while a control such as “*Use EFS*” is applicable to a workstation. A control such as “*Install all latest service packs and hot fixes*” is applicable to the entire environment.

EXCEPTION & WAIVERS

An Exception is an indefinite variance from the standard that has a valid business justification. This is applicable to only Low to Medium risk controls. There could be a control that states “*Disable default shares*”. But if the enterprise is using Microsoft’s SMS, then these shares may be needed. In such cases an exception is filed for each system that requires it.

A Waiver should only be used in exceptional situations and must be limited to a specific period and to a specific system. A waiver could be obtained for a High-risk control. A waiver request must specify the duration of the waiver, the mitigation plan, and an alternate solution, if any, that could be implemented immediately. A Windows 2000 MSB would typically have a control that states “*Use Kerberos for authentication*“. But if there are Windows NT systems in the domain, Kerberos authentication is not possible. Either the system must be upgraded to windows 2000, or the NT service pack must be updated and must use NTLMv2. A waiver must be obtained for the duration of the test and implementation of this project.

RISK RATING

A threat profile must be developed initially. The development of a threat profile helps in deciding what types of threats exist in a particular environment, what the probability that a threat manifests itself into an actual problem, and what the ramifications, costs and consequences are of those threats being realized. Some factors to consider while developing the threat profile:

- Do the threats come from external or internal sources?
- What would the impact be if the vulnerable applications were not present?
- What would the impact be if the systems were compromised?
- What would the impact be if the controls were not implemented?

Based on the threat profile, the criticality of a control is determined. These are classified as High, Medium, or Low risks.

LOW. Residual vulnerabilities have been identified, but would require a high level of resource and skill for any attack using lack of this control to succeed.
Eg: Disable Direct Draw

MEDIUM. Attackers with moderate levels of resource and skill could exploit the identified vulnerabilities in this control
Eg: Use SMB Signing

HIGH. A limited opportunity and little specialized knowledge would be needed to succeed in using the lack of this control to launch an attack.
Eg: Use encrypted, secure channel for communication

Risk rating is very subjective and the working group must decide on the Risk Rating when the MSB is developed. The risk of not implementing a control is not the same for different environment.

For example, “Use of IPsec” might be a Low risk within the Intranet, while it might be a Medium risk on the DMZ. “Extensive Logging” could be “non applicable” in an Intranet, while it is a High Risk (Requirement) in case of system that must be in compliance with VISA CISP.

Sample control from a MSB

Control Standard	Standard Description	Business Impact / Risk	Implementation Procedure	Assessment Procedure	Applicability			Risk
					DC	APP	F/P	
Change the dll Library Search Order (For Windows 2000 Service Pack 3 or greater only)	Change the DLL library search order to search the '%SYSTEMROOT%' folder first.	By default, Windows 2000 searches the current directory when a DLL is needed. A potential intruder could use this weakness to introduce a Trojan DLL that may be used in place of a genuine DLL once the appropriate program is launched or appropriate action is taken. Such Trojan code could lead to the compromise of an entire domain, if not secured.	The value of registry key “SafeDllSearchMode” controls the order in which directories are searched for DLL (Dynamic Link Library) files. The default value of ‘0’ causes the current directory to be searched before the system and Windows directories. Changing the value to ‘1’ causes the search to occur in the following order: 1. %SystemRoot%\System32 2. %SystemRoot% 3. The current directory 4. The folders in user’s %PATH% environment variable. To set the Registry key, Click on Start → run → type “regedt32” and click OK Locate <i>HIVE:HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Session Manage</i> <i>Key: SafeDllSearchMode</i>	Check the registry to see if Click on Start → run → type “regedt32” and click OK Locate <i>HIVE:HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet</i> <i>Key:SafeDllSearchMode is set to value: "1"</i>	X	X	X	H

<i>Data Type: REG_DWORD (DWORD Value) Value Data:1</i>				
--	--	--	--	--

HOST ASSESSMENT

A set of systems must be identified as being representative of the entire platform in the corporate infrastructure. These systems must be evaluated against each of the controls listed in the MSB.

A host assessment report would consist of the following components and each of the controls in the assessment report must refer to the control in the MSB for traceability.

- Date of the Review
- Assessment done by
- Host Name
- Host Type: Domain Controller, Workstation etc
- Host Location: DMZ, Intranet etc.
- Control Title: From the MSB
- Status of control: Compliance, Non Compliance, Not Applicable
- Observation: This is the reason for the status of the control. Also specify if an alternate solution is in place to the suggested one.
- Supporting Document: Name of the work paper that substantiates the finding

Automated tools such as the Microsoft Baseline Analyzer, GFI LANguard, Dumpsec could be used for the assessment. Custom scripts could be used to verify registry setting and file permissions. Also, some controls require manually verification on the representative server.

RISK ASSESSMENT TOOL

There are numerous checklists available that could be used to assess a system. But they do not help in presenting all the systems alongside so that we can analyze the trend and develop a method to correct the problem. An excel spreadsheet tool was developed to solve this problem. This tool attempts to take a snapshot of the environment, and use it to arrive at the risk present in the various hosts.

The working of the tool closely reflects the procedure described above. This tool is configured currently for 20 controls and for 10 hosts. Excel Macros are used in these calculations.

CONTROLS SECTION

The first section deals with the MSB. A set of controls is identified first. Then the risk associated with not implementing each of the control is determined, according to its environment. Also the area of applicability (eg. DMZ, Intranet, Internet; or Workstation, Server, Domain Controller) is established. The controls are entered in the second column. The users are presented with the possible options in a dropdown menu for the subsequent cells to help simplify things.

applicable in worksheet 1, then that control is marked in grey. If the risk, or the applicability is modified in worksheet 1, or if the environment of the host is changed in this worksheet 2, then click on “Update Risk” button to update the risk colors. This color is used in the subsequent sheets for risk rating calculations, and so needs to be accurate.

RISK SUMMARY

In the final section, the finding from the previous worksheet is summarized and presented as numbers for easy interpretation. For each hosts, the number of cells marked as compliant in a particular risk category is calculated. Risk colors are used for these calculations and so the colors marked in worksheet 2 must be accurate.

Host Assessment & Risk Rating										
Developed by Radhika Vedaraman										
	Host Name	MC1	MC2	MC3	MC4	MC5				
High	C	3	2	1	1	2				
	X	1	1	2	2	1				
	T	4	3	3	3	3				
	C _H	0.75	0.667	0.333	0.333	0.667				
	R _H	0.25	0.333	0.667	0.667	0.333				
Medium	C	0	0	0	0	0				
	X	0	0	0	1	1				
	T	0	0	0	1	1				
	C _M	1	1	1	0	0				
	R _M	0	0	0	1	1				
Low	C	0	0	0	0	0				
	X	1	1	1	0	0				
	T	1	1	1	0	0				
	C _L	0	0	0	1	1				
	R _L	1	1	1	0	0				
N/A		1	2	2	2	2				
Overall	Total	6	6	6	6	6				
Risk Rating	%	32.5	36.67	53.33	63.33	46.67				
Compliance	%	60	50	25	25	50				

Figure 4: Worksheet 3, Risk Summary

C_H is the compliance ratio calculated as

Total number of control that was compliant in a Risk category/ total number of controls in that Risk category

R_H is the Risk Ratio calculated as

Total number of control that was Non Compliant in a Risk category / total number of controls in that Risk category

Overall Compliance Ratio is calculated as

Total number of control that was compliant in **all** Risk category/ total number of controls

If there is a need to distinguish the Risk Category, (ie. non compliance of a high risk control is riskier than the non compliance of a low risk control), suitable weights could be applied so that

Overall Risk Rating is

$$\frac{\sum (X_R * R_R)}{\sum T_R}$$

-----, Where R ∈ (High, Medium, Low),

$$\sum T_R$$

X: Number of controls that are not in compliance

T: Number of controls

Excel Macros were used to automate the calculations of the Risk and the Compliance Rating. With any change in the previous worksheets, this page automatically updates to present the current ratings.

ADDRESSING RISK

Risk Assessment techniques identify and quantify potential business risks, such as the impact of a breach of computer network security. Risk Mitigation measures minimize or eliminate many of these risks. When considering which system to tackle first, the risk rating of the systems and its environment must be considered. Systems that are subjected to regulatory controls must be made compliant before the deadline imposed by the act. Even when there is flexibility of deadline, the environment must be considered first, as a vulnerable system in the DMZ is more likely to be exploited than a vulnerable system in the intranet. Within an environment, the role of the system and the type of information that it holds must be considered next. Finally the risk rating value could be used to prioritize.

There are several ways to control risk. A “*preventive*” action will prevent an incident from occurring. “*Protective*” actions reduce the impact of a potential loss, “*corrective*” actions permanently addresses a risk, and “*interim*” actions partially address a risk before longer term measures are implemented.

Another aspect of risk mitigating is Cyber-insurance. It is a specialized type of insurance policy that provides both insurance and risk management services against various types of cyber-risk¹. The biggest players in this area include Insuretrust.com LLC in Atlanta, Hamilton, Bermuda-based Ace Ltd.'s information technology products group and Okemos, Mich.-based J. S. Wurzler Underwriting Managers Inc.'s Website Insurance & Security Program.

CONCLUSION

A current inventory of the network hardware and software should be maintained. By not maintaining a current inventory the risk is increased that non-standard or obsolete software may be introduced into the network. Additionally there is a risk that software changes will not be identified in a timely manner.

With new vulnerabilities coming out everyday, the Minimum Baseline must be constantly updated and maintained. Host assessments and vulnerability scanning must be periodically performed to evaluate and strengthen the overall security of the company. Any change in the environment would alter the risk ratings of the controls. This tool must be updated accordingly in order to produce accurate results.

¹ Definition by Ty Sagalow, chief operating officer and executive VP of New York City based AIG eBusiness Risk Solutions

The choice of risk metrics and the procedure to resolve the gaps would vary depending on the environment, and available resources. This paper explores **one** such option. This idea could be extended to other Network Devices too. After all, this tool is as useful as the user chooses it to be.

REFERENCE

1. “Information technology — Code of practice for information security management”, Reference number ISO/IEC 17799:2000(E)
2. Cardholder Information Security Program
URL: http://usa.visa.com/business/merchants/cisp_index.html?ep=v_sym_cisp#b
3. PROVIDER HIPAA READINESS CHECKLIST – GETTING STARTED
URL: <http://cms.hhs.gov/hipaa/hipaa2/readinesschklst.pdf>
4. Department of Information Technology,
URL: <http://www.mit.gov.in/stqcit/Riskassessment.asp>, January 20, 2003
5. Windows 2000 Security Hardening Guide Version 1.2,
URL: <http://www.microsoft.com/technet/security/prodtech/win2000/win2khg/default.msp>
6. Windows 2000 Security Checklist,
URL: <http://labmice.techtarget.com/articles/securingwin2000.htm>, December 10, 2003
7. Macros, VBA Functions
URL: <http://www.contextures.com/xlfaqMac.html#WSChange>
8. Davis, Glenn, A Risk Assessment Approach to NT Security
URL: www.giac.org/practical/Glenn_Davis.doc, September 2000
9. Bartock, Paul F.Jr., “Microsoft Windows 2000 Network Architecture Guide”,
Version 1.0 Report Number: C4-051R-00, Updated: April 19, 2001
10. Berryman, Paul, Risk Assessment: The Basics
URL: www.giac.org/practical/Paul_Berryman_GSEC.doc, February 16, 2002
11. Innovative E-Business Insurance Protection for Customers of Counterpane Internet Security, Inc. prepared by Frank Crystal & Co., Inc. and Counterpane Internet Security, Inc.
URL: <http://www.counterpane.com/pr-lloydswp.html>
12. RISK ANALYSIS OF GOVERNMENT COMPUTER SYSTEMS, New Zealand Security of Information Technology Publication 104
URL: <http://www.gcsb.govt.nz/nzsit/104/104chap6.htm>, Chapter 6



Upcoming SANS Training

[Click Here for a full list of all Upcoming SANS Events by Location](#)

SANS Madrid 2017	Madrid, ES	May 29, 2017 - Jun 03, 2017	Live Event
SANS Atlanta 2017	Atlanta, GAUS	May 30, 2017 - Jun 04, 2017	Live Event
SANS San Francisco Summer 2017	San Francisco, CAUS	Jun 05, 2017 - Jun 10, 2017	Live Event
Security Operations Center Summit & Training	Washington, DCUS	Jun 05, 2017 - Jun 12, 2017	Live Event
SANS Houston 2017	Houston, TXUS	Jun 05, 2017 - Jun 10, 2017	Live Event
SANS Thailand 2017	Bangkok, TH	Jun 12, 2017 - Jun 30, 2017	Live Event
SANS Milan 2017	Milan, IT	Jun 12, 2017 - Jun 17, 2017	Live Event
SANS Charlotte 2017	Charlotte, NCUS	Jun 12, 2017 - Jun 17, 2017	Live Event
SANS Secure Europe 2017	Amsterdam, NL	Jun 12, 2017 - Jun 20, 2017	Live Event
SEC555: SIEM-Tactical Analytics	San Diego, CAUS	Jun 12, 2017 - Jun 17, 2017	Live Event
SANS Rocky Mountain 2017	Denver, COUS	Jun 12, 2017 - Jun 17, 2017	Live Event
SANS Minneapolis 2017	Minneapolis, MNUS	Jun 19, 2017 - Jun 24, 2017	Live Event
DFIR Summit & Training 2017	Austin, TXUS	Jun 22, 2017 - Jun 29, 2017	Live Event
SANS Columbia, MD 2017	Columbia, MDUS	Jun 26, 2017 - Jul 01, 2017	Live Event
SANS Cyber Defence Canberra 2017	Canberra, AU	Jun 26, 2017 - Jul 08, 2017	Live Event
SANS Paris 2017	Paris, FR	Jun 26, 2017 - Jul 01, 2017	Live Event
SEC564:Red Team Ops	San Diego, CAUS	Jun 29, 2017 - Jun 30, 2017	Live Event
SANS London July 2017	London, GB	Jul 03, 2017 - Jul 08, 2017	Live Event
Cyber Defence Japan 2017	Tokyo, JP	Jul 05, 2017 - Jul 15, 2017	Live Event
SANS Los Angeles - Long Beach 2017	Long Beach, CAUS	Jul 10, 2017 - Jul 15, 2017	Live Event
SANS Cyber Defence Singapore 2017	Singapore, SG	Jul 10, 2017 - Jul 15, 2017	Live Event
SANS ICS & Energy-Houston 2017	Houston, TXUS	Jul 10, 2017 - Jul 15, 2017	Live Event
SANS Munich Summer 2017	Munich, DE	Jul 10, 2017 - Jul 15, 2017	Live Event
SANSFIRE 2017	Washington, DCUS	Jul 22, 2017 - Jul 29, 2017	Live Event
Security Awareness Summit & Training 2017	Nashville, TNUS	Jul 31, 2017 - Aug 09, 2017	Live Event
SANS San Antonio 2017	San Antonio, TXUS	Aug 06, 2017 - Aug 11, 2017	Live Event
SANS Prague 2017	Prague, CZ	Aug 07, 2017 - Aug 12, 2017	Live Event
SANS Hyderabad 2017	Hyderabad, IN	Aug 07, 2017 - Aug 12, 2017	Live Event
SANS Boston 2017	Boston, MAUS	Aug 07, 2017 - Aug 12, 2017	Live Event
SANS Salt Lake City 2017	Salt Lake City, UTUS	Aug 14, 2017 - Aug 19, 2017	Live Event
SANS New York City 2017	New York City, NYUS	Aug 14, 2017 - Aug 19, 2017	Live Event
SANS Virginia Beach 2017	Virginia Beach, VAUS	Aug 21, 2017 - Sep 01, 2017	Live Event
SANS Stockholm 2017	OnlineSE	May 29, 2017 - Jun 03, 2017	Live Event
SANS OnDemand	Books & MP3s OnlyUS	Anytime	Self Paced